

Project: Kerosene Vale Ash
repository Stage 2

Ongoing operational noise
measurements

Prepared for:
EnergyAustralia NSW

Project: 247023

16 November 2015

Document control record

Document prepared by:

Aurecon Australasia Pty Ltd

ABN 54 005 139 873

Level 5, 116 Military Road

Neutral Bay NSW 2089

PO Box 538

Neutral Bay NSW 2089

Australia

T +61 2 9465 5599

F +61 2 9465 5598



E sydney@aurecongroup.com

W aurecongroup.com

A person using Aurecon documents or data accepts the risk of:

- a) Using the documents or data in electronic form without requesting and checking them for accuracy against the original hard copy version.
- b) Using the documents or data for any purpose not agreed to in writing by Aurecon.

Document control							aurecon
Report Title		Ongoing operational noise measurements					
Document ID		247023-KV-REP-08-REV3	Project Number		247023		
File Path		\\Aurecon.info\Shares\AUSYD\Projects\BG\247023\3.Project Delivery\12.Deliverables\Acoustics\June 2015 Survey\Report\KVAR Compliance Noise June 2015 rev3.docx					
Client		EnergyAustralia NSW	Client Contact		Coleen Milroy		
Rev	Date	Revision Details/Status	Prepared by	Author	Verifier	Approver	
1	22 July 2015	Initial Draft	AL	AL	BD	HT	
2	24 July 2015	Final issue	AL	AL	BD	HT	
2	16 November 2015	Final issue with minor modifications	AL	AL	BD	HT	
Current Revision		3					

Approval			
Author Signature		Approver Signature	
Name	Akil Lau	Name	Heather Tilley
Title	Acoustic Consultant	Title	Environmental Consultant

Contents

1	Introduction	1
1.1	Site details	1
2	Noise criteria	3
3	Noise measurements	3
3.1	Measurement methodology	3
3.2	Measurement locations	4
3.3	Conditions during measurements	5
3.3.1	Operating conditions	5
3.3.2	Meteorological conditions	5
3.4	Results	6
3.4.1	Ambient noise measurements	6
3.4.2	SEL measurements	7
4	Noise assessment	7
4.1	Location A (60 Skelly Road)	7
4.2	Location B (10 Skelly Road)	8
4.3	Location C (21 Neubeck Street)	8
4.4	Location D	8
5	Analysis and recommendations	8
5.1	Data analysis	8
6	Conclusion	10
7	References	10

Appendices

Appendix A

Measured noise spectra

Appendix B

Glossary of terms

Appendix C

Site photograph

Appendix D

Weather data

Figures

Figure 1 | Site details

2

Figure 2 Noise measurement locations	5
Figure 3 Location D	16

Tables

Table 1: Representative noise measurement locations	1
Table 2: Representative noise measurement locations	4
Table 3: Noise measurement results (15 minute)	6
Table 4: SEL noise measurement results at Location D	7
Table 5: Truck movement data	9
Table 6: Noise predictions from truck movements based on SEL measurements	9
Table 7: Meteorological conditions during noise survey	17

1 Introduction

Aurecon was engaged by EnergyAustralia NSW to carry out ongoing operational noise monitoring for the Kerosene Vale Stage 2 Ash Repository (KVAR) located in Wallerawang, NSW in accordance with Project Approval Application No. 07_0005. The noise measurements were carried out on Sunday 28 June and Monday 29 June 2015, during the early morning and evening periods as per the requirements outlined in the KVAR Stage 2 Operational Noise and Vibration Management Plan (ONVMP).

1.1 Site details

The project site consists of an Ash Repository which services the nearby Wallerawang Power Station (WPS). During normal operation of the KVAR Stage, the following major noise emissions would be expected.

- Unloading of ash from trucks at the repository.
- Placement and handling of ash at the repository site.
- Operation of trucks on the private haulage road; this includes trucks leaving WPS loaded with ash (travelling north) and returning from the repository empty (travelling south).

However, the site is no longer fully operational and no noise emissions from the location of the KVAR would be expected.

Figure 1 shows the site layout and location of sensitive receivers relative to the major noise sources which include WPS, as well as major roads in the area. Table 1 outlines the most affected sensitive receivers and their distance to the haulage road.

Table 1: Representative noise measurement locations

Representative sensitive receiver	Distance to haulage road (meters)*
60 Skelly Road	300
10 Skelly Road	270
21 Neubeck Street	145

Note * - distance relates to the property boundary or a point 30 m from the dwelling location

It should be noted that coal supply trucks also utilise the private haulage road. Their noise impacts are not considered to be part of the Stage 2 KVAR works and thus their noise impact is outside the scope of this report. While undertaking noise measurements it is extremely difficult to visually distinguish between coal supply trucks and ash trucks, therefore, for the purpose of prediction of noise emissions from ash trucks alone, EnergyAustralia NSW provides the truck movement numbers for the periods of measurement.

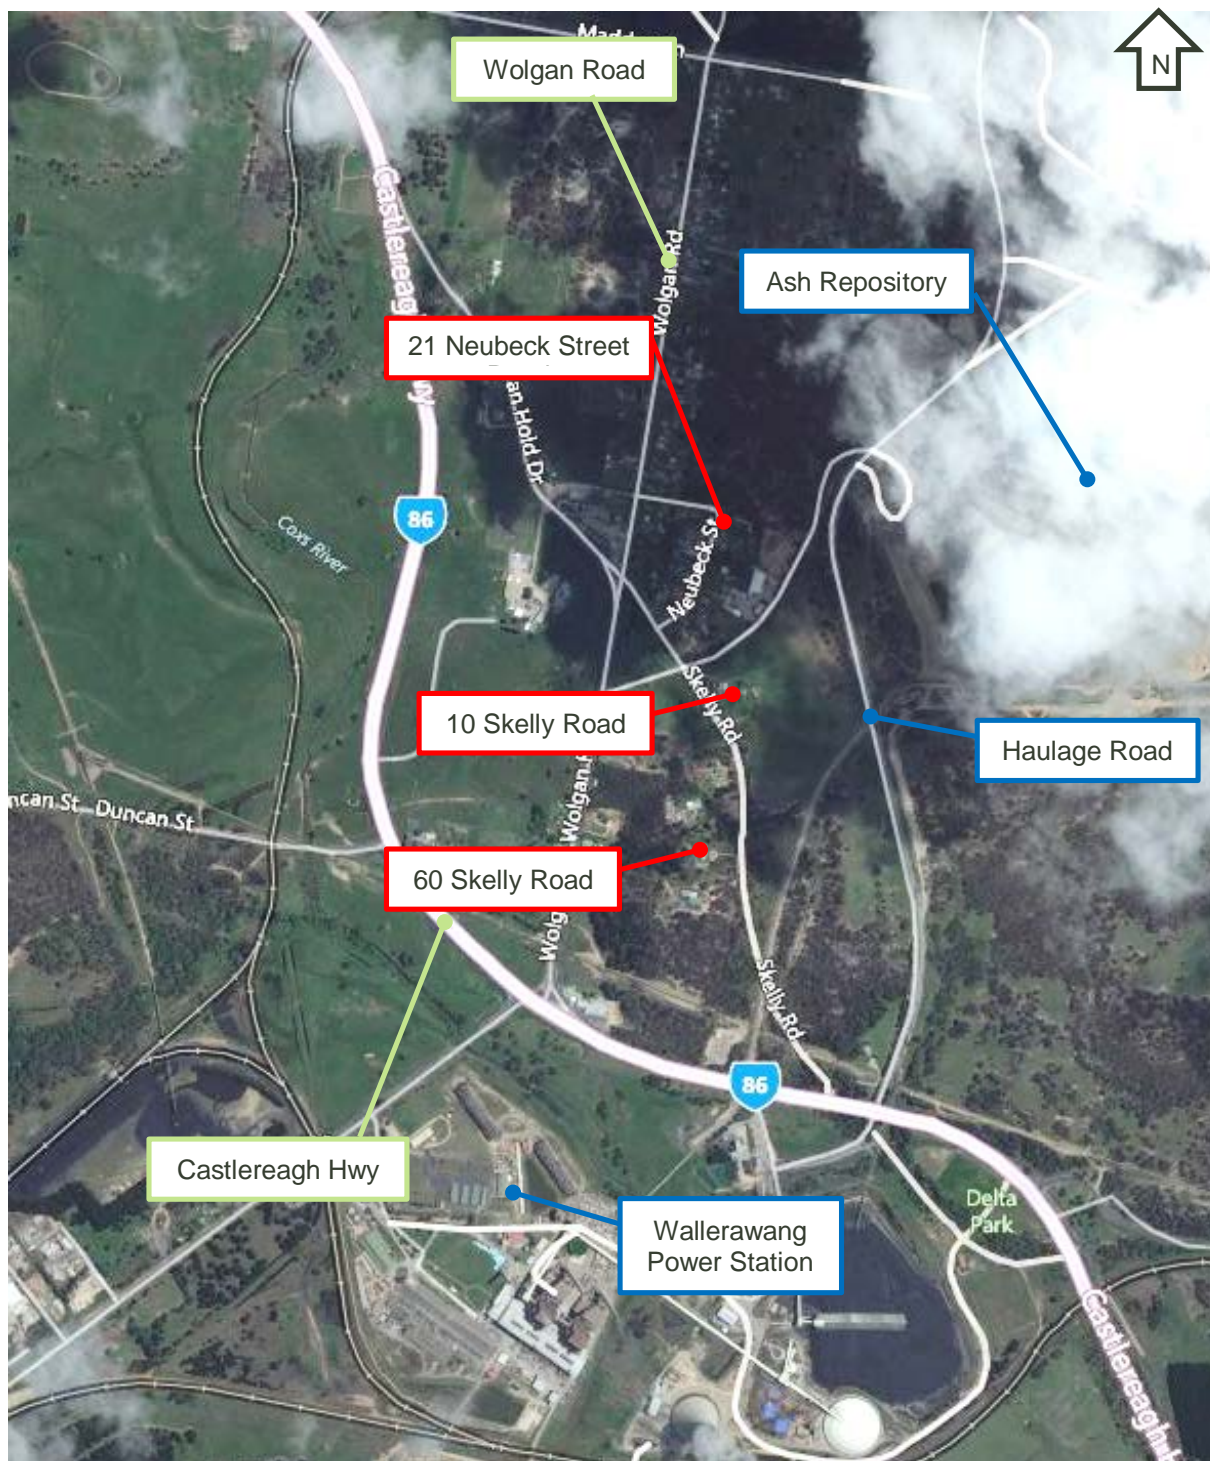


Figure 1 | Site details

2 Noise criteria

The applicable operational noise criteria are outlined in the Project Approval, Application No. 07_0005. The criteria are summarised in Condition 2.15 as follows:

2.15 The cumulative operational noise from the ash placement area and ash haulage activity shall not exceed a L_{Aeq} (15 minute) of 40 dB(A) at the nearest most affected sensitive receiver during normal operating hours as defined in condition 2.8.

This criterion applies under the following meteorological conditions:

- a) Wind speeds up to 3 m/s at 10 meters above ground; and/or*
- b) Temperature inversion conditions of up to 3°C/100 m and source to receiver gradient winds of up to 2 m/s at 10 m above ground level*

Normal operating hours in accordance with Conditions 2.8 are 7:00 am to 10:00 pm Monday to Sunday.

3 Noise measurements

3.1 Measurement methodology

Two types of measurements were carried out at the site:

- Ambient noise measurements and
- Sound exposure level measurements.

The measurements were carried out on Sunday 28 June and Monday 29 June 2015, during the early morning and evening periods, when the noise impacts are likely to be the most significant.

Ambient noise measurements

The ambient compliance noise measurements were conducted using a Larson Davis 831 Type 1 sound level meter which was set to 'A' frequency weighting, 'F' time weighting, and was fitted with an approved windshield. Measurements were typically taken at a height of 1.2 metres and at least 3.5 metres from any reflecting structure other than the ground.

Measurements were undertaken for a period of 15 minutes at each of the selected measurement locations. A Larson Davis CAL200 was utilised to calibrate all sound level meters before and after each series of measurements with no significant calibration drift noted.

The weather during the ambient noise logging ranged from overcast to sunny conditions, and wind speeds were less than 3m/s at ground level. Measurements were generally taken in accordance with the Australian Standard AS 1055 1997: *Acoustics – Description and measurement of environmental noise*.

Sound exposure level (SEL) measurements

The Sound Exposure Level (SEL) measurements were also carried out using the Larson Davis 831 Type 1 sound level meter. SEL is the equivalent one second A-weighted sound level which produces the same sound energy as an actual identified event. The SEL measurement was commenced when a truck was observed to pass a nominated reference location and stopped when the end of the truck passed a second nominated reference location. The nominated reference locations were identified where the truck could be visually observed.

3.2 Measurement locations

The measurement locations were chosen to represent the three most affected sensitive receivers as outlined in the ONVMP. The three most affected receivers prior to commencement of the measurements were identified based on the information in the Stage 2 Kerosene Vale Ash Repository operational noise review.

Due to the increased background noise level at each of the three monitoring locations it was difficult to assess individual truck noise events. A fourth noise monitoring location identified as Location D and shown in Appendix C, was selected closer to the haulage route to measure individual truck pass-by events. Table 2 and Figure 2 outline the noise measurement locations.

Table 2: Representative noise measurement locations

Measurement location	Measurement distance to haulage road (meters)	Representative sensitive receiver
A	300	60 Skelly Road
B	270	10 Skelly Road
C	145	21 Neubeck Street
D	80	-



Figure 2 | Noise measurement locations

3.3 Conditions during measurements

3.3.1 Operating conditions

EnergyAustralia NSW provided the following information regarding the operations during the noise measurement periods.

- No trucks were operating during any of the measurement periods.
- The ash silos were operating at approximately 85% capacity.

3.3.2 Meteorological conditions

The meteorological conditions applicable to the noise survey period are based on meteorological data provided at 15 minute intervals from the Mt Piper weather station. This data is shown in Appendix D.

No rain periods were experienced and no wind was induced on the microphone during the ambient noise and SEL measurements.

3.4 Results

3.4.1 Ambient noise measurements

The results from the 15 minute ambient noise measurements at each of the measurement locations are shown in Table 3.

Table 3: Noise measurement results (15 minute)

Location	Date of measurement	Time	Measured sound pressure level dB(A)					Number of truck Pass-bys and direction of travel ¹		
			L _{Aeq} [#]	L _{Amax} [*]	L _{Amin} ^{**}	L _{A10} ^{^^}	L _{A90} [^]	North	South	Total
60 Skelly Road (A)	Sunday 28/06/2015	8:26	44	66	39	45	41	0	0	0
		19:31	42	62	35	45	37	0	0	0
	Monday 29/06/2015	8:59	41	55	36	43	38	0	0	0
		20:43	38	48	34	40	36	0	0	0
10 Skelly Road (B)	Sunday 28/06/2015	8:09	46	63	38	47	40	0	0	0
		19:14	52	74	36	56	38	0	0	0
	Monday 29/06/2015	8:39	44	58	36	46	39	0	0	0
		20:25	41	45	39	42	40	0	0	0
21 Neubeck Street (C)	Sunday 28/06/2015	7:50	46	70	39	46	42	0	0	0
		18:56	45	65	38	45	40	0	0	0
	Monday 29/06/2015	8:20	47	66	37	47	38	0	0	0
		20:03	49	63	36	52	38	0	0	0

Note : 1 - Truck counts include ash trucks and light commercial trucks.

Exceedances of the L_{Aeq} (15 min) of 40 dB(A) are shown in Bold.

L_{Aeq} refers to A-weighted equivalent continuous sound pressure level over measurement period. It is used to quantify the average noise level over a time period.

* L_{Amax} refers to the maximum A-weighted noise level detected during the measuring period. It refers to the maximum background noise detected.

** L_{Amin} refers to the minimum A-weighted noise level detected during the measuring period. It refers to the minimum background noise detected.

^^ L_{A10} refers to the A-weighted noise level which is exceeded for only 10% of the measuring period. It is usually used as the descriptor for intrusive noise level and represents ambient road traffic noise in general.

^ L_{A90} refers to the A-weighted noise level which is exceeded for 90% of the measuring period. It is usually used as the descriptor for background noise level during the measurement period.

The measured L_{Aeq} (15 min) generally exceeded the assessment criteria of L_{Aeq} (15 min) of 40 dB(A). As there were no truck movements associated with the operation of the KVAR, the KVAR operations did not contribute to the high background noise levels at all of the measured locations. The high noise levels are associated with local noise events such as traffic from surrounding roads and birds.

3.4.2 SEL measurements

The individual truck pass-by noise event (SEL) measurements at Location D (approximately 80 meters from the haulage road) were conducted on 7 November 2011, 21 April 2013 and 31 March 2014. The results are summarised in Table 4. The number of actual truck pass-bys counted during the daytime survey are also summarised in Table 4. These data will be used to predict the noise impact from the truck movement on the sensitive receivers.

Based on the visual site inspection, the grade (slope) of the haulage road rises from south to north. The trucks moving in the northerly direction on the haulage road appear to rev the engine more compared to the trucks moving in the opposite direction and thereby producing a marginally higher SEL as evident in the results summarised in Table 4.

Table 4: SEL noise measurement results at Location D

Date	Truck travelling direction	Average event duration (sec)	Average SEL dB(A)	No. of valid truck event measurements
7/11/2011	South	28.9	68	8
	North	18.1	70	9
21/04/2013	South	24.0	67	5
	North	19.5	70	7
31/04/2014	South	27.7	69	2
	North	28.3	70	2

4 Noise assessment


General observation regarding the ambient noise environment, as well as the truck movements and ash repository operations are described as follows.

- Operational noise from the KVAR site and the truck engine noise was inaudible at the noise sensitive receiver locations during all the attended noise measurements and no ash trucks were visible on the haul road.
- The noise levels at all locations were affected by background noise sources such as bird/insects, domestic animals and domestic noise. Background noise was dominated by the intermittent traffic noise from nearby Castlereagh Highway and Wolgan Road.

4.1 Location A (60 Skelly Road)

The background noise contributions at Location A were predominantly from the traffic noise from Castlereagh Highway and distant traffic. Faint traffic noise from Wolgan Road was also audible. The haulage road was clearly visible from this location and no coal or ash trucks were visible on the haulage road. Noise from birds and insects also contributed to the ambient noise at this location.

During the Sunday morning measurement, a faint low frequency hum (20Hz – 16Hz) was audible and appeared to be originating from the Blackmans Flat direction, possibly from Mt Piper Power Station or the nearby mining area.



As shown in Table 3, the background noise (L_{A90}) during the Sunday morning measurement was observed to be higher than the rest of the measurements, predominantly due to heavy traffic on the Castlereagh Highway and nearby roads.

4.2 Location B (10 Skelly Road)

Contributions to the background noise at Location B were predominantly from birds/insects/animals and traffic on Wolgan Road and Skelly Road. Traffic noise from Wolgan Road and Skelly Road was clearly audible at this location. The haulage road was clearly visible from this measuring location and no coal or ash truck movement was noticed during the two days of measurements.

On Sunday morning, a faint low frequency hum (20 Hz – 16 Hz) was audible and appeared to be originating from the Blackmans Flat direction, possibly from Mt Piper Power Station or the nearby mining area.

Even in the absence of truck pass-bys, background noise measurements were relatively consistent for all measurements at this location.

4.3 Location C (21 Neubeck Street)

Contributions to the background noise at Location C were predominantly from birds/insects/animals and distant traffic. Traffic noise from Wolgan Road was clearly audible and substantially contributed to the ambient noise levels.

On Sunday morning, a faint low frequency hum (20 Hz – 16 Hz) was audible and appeared to originate from the Blackmans Flat direction, possibly from Mt Piper Power Station or the nearby mining area.

The haulage road was not clearly visible from this location because of an earth mound and heavy vegetation blocking the line of sight; however no truck engine noise was audible during the entire survey.

Background noise (L_{A90}) during the Sunday morning measurement was observed to be higher than the rest of the measurements, predominantly due to heavy traffic on the Wolgan Road and nearby roads.

4.4 Location D

The noise data collected at Location D (Figure 2 and Appendix C) measured the SEL of individual truck pass-by events on 07 November 2011, 22 April 2013 and 31 April 2014 (See Table 4).

This location is closest to the truck haulage road and as such, each truck pass-by was the dominant noise source (clearly audible above other ambient noise sources) during these monitoring events.

5 Analysis and recommendations

5.1 Data analysis

As can be observed from the summary of noise measurements presented above, the existing ambient noise levels $L_{Aeq} (15 \text{ min})$ exceed the assessment criteria of $L_{Aeq} (15 \text{ min})$ of 40 dB(A) on most of the occasions. The background noise (L_{A90}) from the various noise sources only exceeded the noise criteria of 40dB(A) on two occasions. This section deals with noise prediction based on the number of truck movements for any worst case 15 minute period.

To assess the impact of the ash truck noise emissions, the influence of individual truck pass-by noise events have to be taken into account. Based on the SEL measurement results (shown in Table 4) and the number of truck movements provided by EnergyAustralia NSW, an $L_{Aeq (15 \text{ min})}$ noise level was predicted, which takes into account the total number of truck pass-bys (including ash trucks and small commercial vehicles), and the distance of the noise source from the receiver. The assessment does include calculated barrier effect (- 2dBA) at Location C due to the earth mound (which blocks the line of sight between 21 Neubeck Street and the haulage road) located on the northern side of the site attenuating the noise from haulage road. Trucks usually operate at a constant rate, with approximate 15-20 minute circuits for each truck. Table 5 provides a summary of truck pass-bys based on information collected during previous site visit.

Table 5: Truck movement data

Periods	Information collected during site visit on 30-31 March 2014	
	Total number of trucks pass bys/ 45 minutes	Average number of trucks pass bys/ 15 minutes
Morning 30/03/2014	7	2.3
Evening 30/03/2014	2	0.7
Morning 31/03/2014	7	2.3[#]
Evening 31/03/2014	3	1.0

Note: Figure in **bold** is the worst-case truck movement (most frequent) used to predict the noise contribution from the truck movements (shown in Table 6)

Maximum number of truck pass- bys as per information collected during the site visit.

As shown in Table 5, the maximum number of truck pass-bys was during the morning period on both 30/03/2014 and 31/03/2014. The lowest truck pass-bys was during the evening period on 30/03/2014. The noise emissions from the ash repository are considered to be below the assessment criteria as they were predominantly inaudible during the noise survey and could not be distinguished.

Table 6 provides the noise predictions from haulage trucks alone at the nearest sensitive receivers based on SEL measurements. The prediction is calculated from the movement of ash trucks based on the worst case scenario (i.e. 2.3 truck pass bys during any 15 minute period).

Table 6: Noise predictions from truck movements based on SEL measurements

Sensitive receiver	Distance to haulage road (m)	No. of average truck movements per 15min	Predicted $L_{Aeq (15 \text{ min})}$ (dBA)	Criteria $L_{Aeq (15 \text{ min})}$ (dBA)
60 Skelly Road	300	2.3	32	40
10 Skelly Road	270	2.3	33	40
21 Neubeck Street	145	2.3	37*	40

Note * - Include calculated barrier attenuation (-2dBA) provided by the earth mound blocking direct line of sight between the residence and haulage road.

Based on the worst case scenario the noise impact from truck movements complies with noise criteria of $L_{Aeq} (15 \text{ min})$ of 40 dB(A) at all the sensitive receiver locations. There were no truck movements during this current noise survey, the operational noise emissions from the Stage 2 KVAR is considered compliant with Condition 2.15 of the Project Approval.

6 Conclusion

Aurecon conducted ongoing operational noise monitoring for the Stage 2 KVAR located in Wallerawang, NSW. The noise measurements were carried out at the three most affected sensitive receiver locations on Sunday 28 June and Monday 29 June 2015, in the early morning and evening in accordance with the KVAR Stage 2 ONVMP.

The assessment criteria of $L_{Aeq} (15 \text{ minute})$ of 40 dB(A) from all ash haulage and placement associated operational noise emissions at the nearest sensitive receivers is outlined in the Project Approval, Application No. 07_0005.

The primary contributor to the background and ambient noise levels at all measurement locations was the traffic noise on the nearby roads. No ash truck movements occurred during the noise measurement periods, thus the operational noise emissions from the Stage 2 KVAR are considered compliant with the Conditions of Approval.

7 References


- Kerosene Vale Stage 2 Ash Repository, Operational Environmental Management Plan (OEMP), Parsons Brinckerhoff, April 2009, which includes:
 - Appendix A: KVAR Stage 2 Operations, Operational Noise and Vibration Management Plan (ONVMP), Parsons Brinckerhoff, April 2009
- Project Approval (PA), Application: No 07_0005, Delta Electricity, 26 November 2008, Department of Planning
- Stage 2 Kerosene Vale Ash Repository operational noise review, Parsons Brinckerhoff, September 2009.
- Office of Environment & Heritage (OEH) *Interim Construction Noise Guideline (ICNG)*.
- Office of Environment & Heritage (OEH) *Industrial Noise Policy (INP)*.
- Australian Standard AS 1055 1997: *Acoustics – Description and measurement of environmental noise*.




Appendix A

Measured noise spectra


60 Skelly Road - Location A

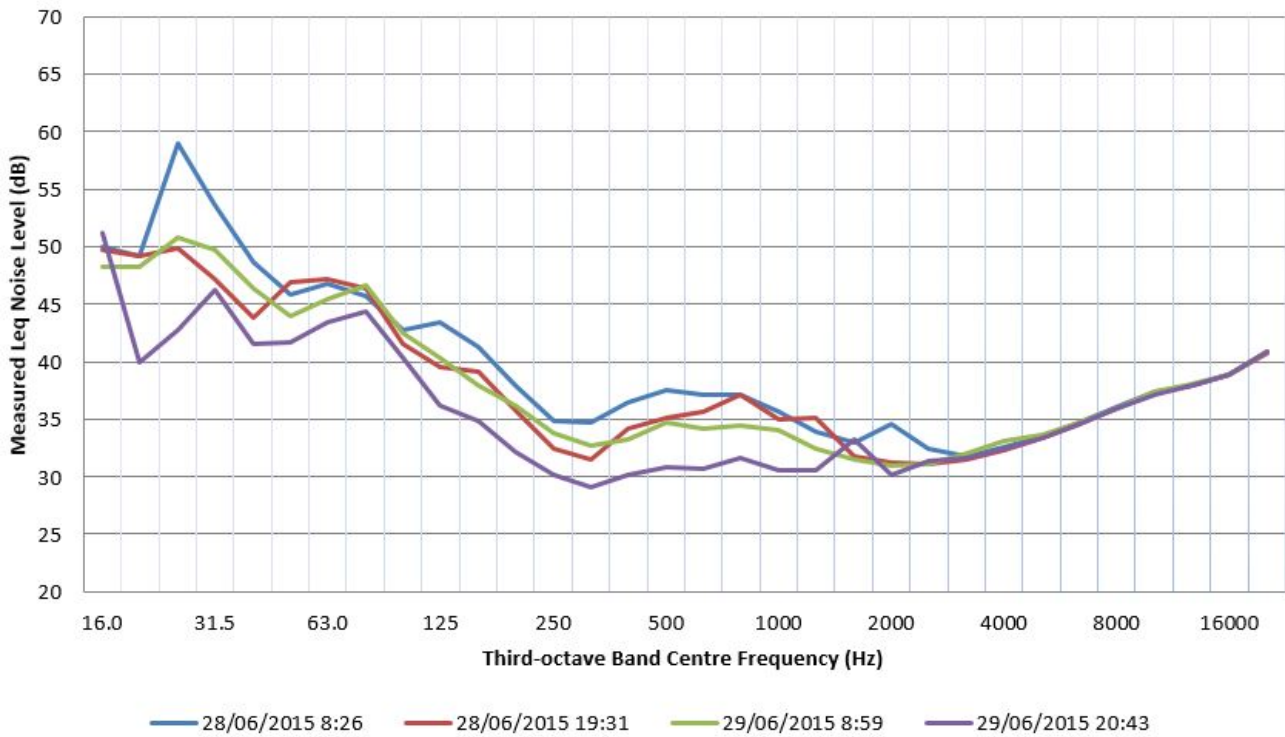

10 Skelly Road - Location B

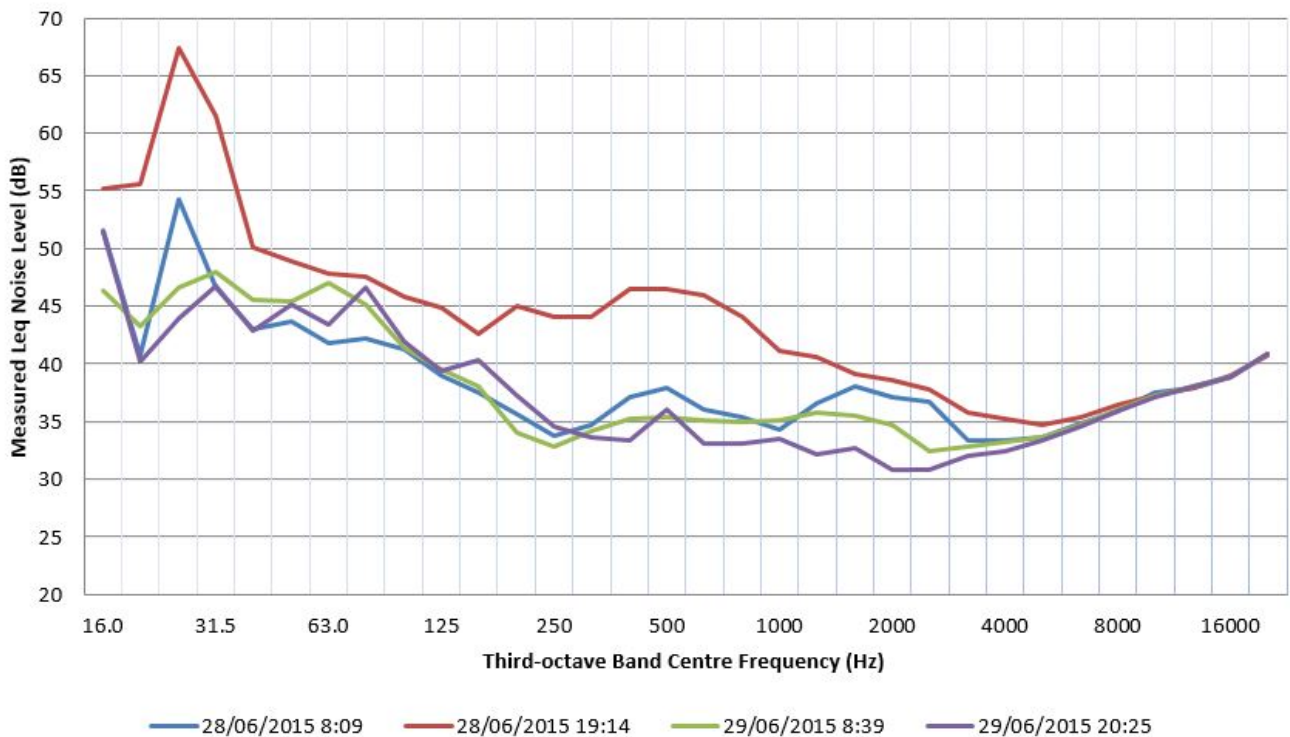

21 Neubeck Street - Location C

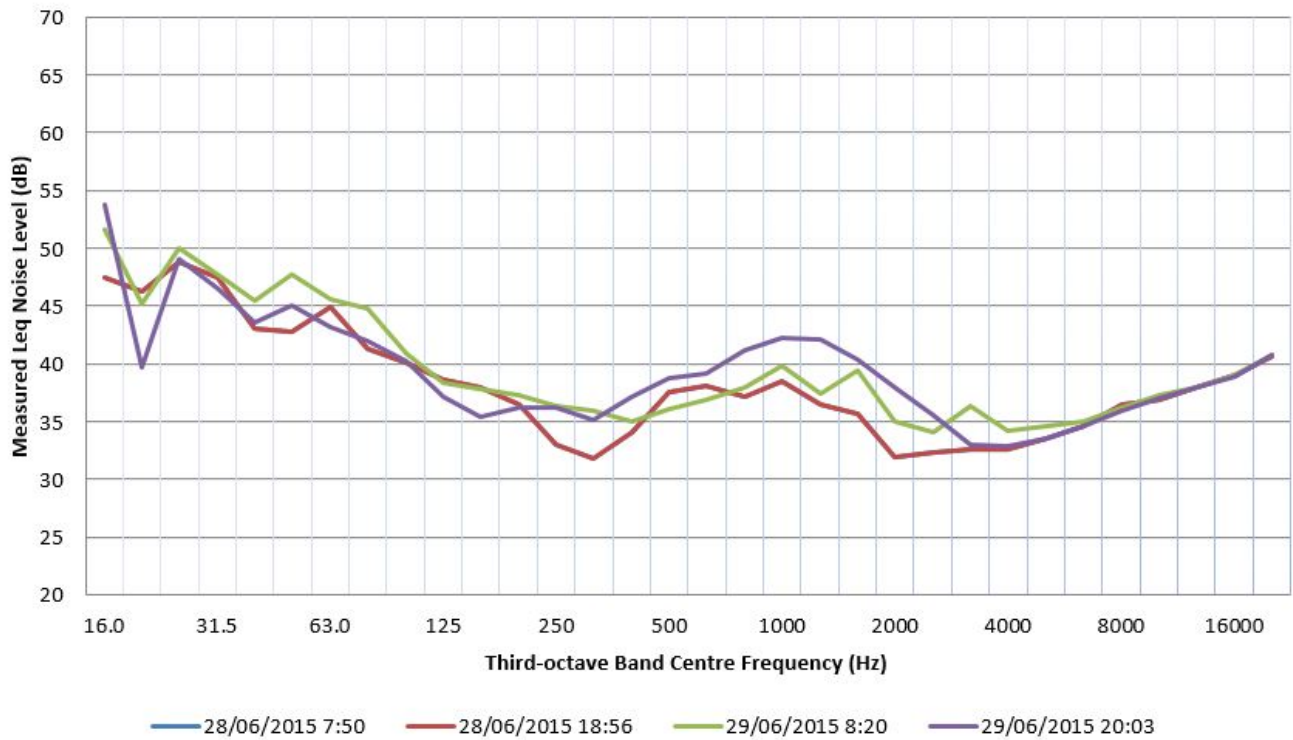

Appendix B

Glossary of terms

Term	Definition
Sound Pressure Level	Sound or noise is the sensation produced at the ear by very small fluctuations in atmospheric pressure. The human ear responds to changes in sound pressure over a very wide range (from 20 microPascals to 60 Pascals). A scale that compresses this range to a more manageable size and that is best matched to subjective response is the logarithmic scale, rather than a linear scale.
Sound Pressure Level (L_p)	<p>Is defined as:</p> $L_p = 10 \log_{10} \left(\frac{p^2}{p_{ref}^2} \right) dB$ <p>In the above equation, p is the sound pressure fluctuation (above or below atmospheric pressure), and p_{ref} is 20 microPascals (2×10^{-5} Pa), the approximate threshold of hearing. To avoid a scale which is too compressed, a factor of 10 is included, giving rise to the decibel, or dB for short.</p>
A-Weighted Decibel (dB(A)) & Loudness	In some circumstances, the sound pressure level is expressed as C-Weighted decibels, instead of the more common A-Weighted. The C-Weighting filter is designed to replicate the response of the human ear above 85 dB, and places a greater weighting on low frequency noise.
L_{Aeq}	The time averaged C-weighted sound pressure level for a time interval, as defined in AS1055.1. It is generally described as the equivalent continuous C-weighted sound pressure level that has the same mean square pressure level as a sound that varies over time. It can be considered as the average sound pressure level over the measurement period.
L_{Ceq}	The time averaged C-weighted sound pressure level for a time interval, as defined in AS1055.1. It is generally described as the equivalent continuous C-weighted sound pressure level that has the same mean square pressure level as a sound that varies over time. It can be considered as the average sound pressure level over the measurement period.
L_{An}	The sound level, which, for a specified time interval, in relation to an investigation of a noise, means the A-weighted sound pressure level that is equalled or exceeded for n% of the interval. Commonly used percentages are 1, 10, 90 & 99%.

Term	Definition
L_{Cpk}	The peak C-weighted sound pressure level for a time interval.
$L_{Cmax,T}$	The average maximum C-weighted sound pressure level, which, for the specified time interval, means the C-weighted sound pressure level during the interval obtained by using the fast time weighting and arithmetically averaging the maximum sound levels of the noise during the interval. Under certain conditions the 10th percentile noise level, $L_{C10,T}$, can represent the average maximum C-weighted sound pressure level.
L_{A10}	A-weighted noise level which is exceeded for only 10% of the measuring period. It is usually used as the descriptor for intrusive noise level and represents ambient road traffic noise in general.
L_{A90}	A-weighted noise level which is exceeded for 90% of the measuring period. It is usually used as the descriptor for background noise level during the measurement period.
L_{Amin}	Minimum A-weighted noise level detected during the measuring period. It refers to the minimum background noise detected.
Octave	Frequency bands allow a representation of the spectrum associated with a particular noise. They are an octave wide, meaning that the highest frequency in the band is just twice the lowest frequency, with all intermediate frequencies included and all other frequencies excluded. Each octave band is described by its centre frequency.
Maximum Exposure Time (Hours)	The maximum possible time a person can be safely exposed to a specific noise level (L_{Aeq}).
Sound Exposure Level (SEL)	Sound exposure level abbreviated as SEL and L_{AE} , is the total noise energy produced from a single noise event. The Sound Exposure Level is a metric used to describe the amount of noise from an event such as an individual aircraft flyover. It is computed from measured dB(A) sound levels. The Sound Exposure Level is the integration of all the acoustic energy contained within the event.

Appendix C

Site photograph



Figure 3 | Location D

Appendix D

Weather data

Table 7: Meteorological conditions during noise survey

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
28/06/2015	0:00	0.00	1.02	252.30	-1.23	101.00
28/06/2015	0:15	0.00	1.22	232.13	-2.00	101.00
28/06/2015	0:30	0.00	0.71	263.43	-1.73	101.00
28/06/2015	0:45	0.00	0.79	268.60	-2.20	101.00
28/06/2015	1:00	0.00	0.91	268.60	-2.23	101.00
28/06/2015	1:15	0.00	1.00	268.60	-2.50	101.00
28/06/2015	1:30	0.00	0.64	268.60	-2.63	101.00
28/06/2015	1:45	0.00	0.75	268.60	-2.57	100.00
28/06/2015	2:00	0.00	0.56	268.60	-2.73	100.00
28/06/2015	2:15	0.00	0.88	268.60	-3.17	100.00
28/06/2015	2:30	0.00	0.76	268.60	-3.00	100.00
28/06/2015	2:45	0.00	0.70	268.60	-3.20	100.00
28/06/2015	3:00	0.00	0.86	268.60	-3.60	100.00
28/06/2015	3:15	0.00	0.29	268.60	-3.47	99.00
28/06/2015	3:30	0.00	0.44	268.60	-3.67	99.00
28/06/2015	3:45	0.00	1.01	268.60	-3.87	99.00
28/06/2015	4:00	0.00	0.86	268.60	-3.80	99.00
28/06/2015	4:15	0.00	0.79	268.60	-4.13	98.67
28/06/2015	4:30	0.00	0.68	268.60	-4.30	98.00
28/06/2015	4:45	0.00	0.70	268.60	-4.27	98.00
28/06/2015	5:00	0.00	1.18	268.60	-4.23	98.00
28/06/2015	5:15	0.00	1.38	268.60	-4.57	98.00
28/06/2015	5:30	0.00	1.14	268.60	-4.17	97.00
28/06/2015	5:45	0.00	0.64	268.60	-4.33	97.00
28/06/2015	6:00	0.00	0.91	268.60	-4.53	97.00

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
28/06/2015	6:15	0.00	1.19	268.60	-4.73	97.00
28/06/2015	6:30	0.00	0.90	268.60	-4.50	96.00
28/06/2015	6:45	0.00	1.03	268.60	-4.77	96.00
28/06/2015	7:00	0.00	0.61	268.60	-4.63	96.00
28/06/2015	7:15	0.00	0.41	268.60	-4.70	96.00
28/06/2015	7:30	0.00	0.72	268.60	-4.23	95.67
28/06/2015	7:45	0.07	0.80	268.60	-2.87	94.67
28/06/2015	8:00	0.00	0.27	272.07	-1.37	93.67
28/06/2015	8:15	0.00	0.21	298.47	1.17	90.00
28/06/2015	8:30	0.00	0.20	293.97	3.03	85.67
28/06/2015	8:45	0.00	0.67	87.43	2.87	77.67
28/06/2015	9:00	0.00	1.01	31.30	2.57	75.33
28/06/2015	9:15	0.00	0.47	31.27	4.07	69.67
28/06/2015	9:30	0.00	0.84	26.97	5.70	62.67
28/06/2015	9:45	0.00	1.08	45.57	6.73	60.33
28/06/2015	10:00	0.00	1.04	33.30	7.83	58.67
28/06/2015	10:15	0.00	1.06	37.13	9.00	58.67
28/06/2015	10:30	0.00	1.35	59.83	10.57	56.67
28/06/2015	10:45	0.00	1.38	38.50	11.80	49.33
28/06/2015	11:00	0.00	1.16	56.50	12.37	42.00
28/06/2015	11:15	0.00	0.95	70.63	13.17	47.00
28/06/2015	11:30	0.00	1.50	126.50	13.37	50.00
28/06/2015	11:45	0.00	1.72	241.03	14.03	46.00
28/06/2015	12:00	0.00	1.47	218.03	14.30	46.33
28/06/2015	12:15	0.00	1.42	178.17	13.83	46.00
28/06/2015	12:30	0.00	1.47	153.23	14.10	48.00
28/06/2015	12:45	0.00	1.50	218.30	14.20	48.00
28/06/2015	13:00	0.00	1.19	188.13	14.03	49.00
28/06/2015	13:15	0.00	0.86	101.57	14.37	48.33
28/06/2015	13:30	0.00	1.17	80.73	14.20	48.67
28/06/2015	13:45	0.07	1.41	165.63	14.50	49.00
28/06/2015	14:00	0.00	1.60	218.90	14.73	48.33
28/06/2015	14:15	0.00	2.05	280.20	14.37	49.33
28/06/2015	14:30	0.00	1.50	227.53	14.13	48.33
28/06/2015	14:45	0.00	1.98	231.50	14.03	50.67
28/06/2015	15:00	0.00	2.05	268.57	13.23	52.33

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
28/06/2015	15:15	0.00	2.26	282.10	12.83	53.67
28/06/2015	15:30	0.00	1.76	258.50	12.50	54.00
28/06/2015	15:45	0.00	1.52	285.47	12.33	54.67
28/06/2015	16:00	0.00	1.36	208.37	11.93	54.00
28/06/2015	16:15	0.00	0.21	231.10	10.80	65.00
28/06/2015	16:30	0.00	0.22	255.10	8.33	73.33
28/06/2015	16:45	0.00	1.11	251.10	6.27	81.33
28/06/2015	17:00	0.00	1.54	247.97	4.77	87.00
28/06/2015	17:15	0.00	1.45	244.40	3.80	91.67
28/06/2015	17:30	0.00	1.55	249.30	2.90	93.33
28/06/2015	17:45	0.00	1.61	247.23	2.67	91.67
28/06/2015	18:00	0.00	1.59	262.17	1.97	91.67
28/06/2015	18:15	0.00	1.25	242.17	1.73	92.00
28/06/2015	18:30	0.00	1.50	241.67	1.27	93.33
28/06/2015	18:45	0.00	1.73	235.97	1.07	94.00
28/06/2015	19:00	0.00	1.08	246.70	0.70	96.00
28/06/2015	19:15	0.00	1.08	251.93	0.63	97.00
28/06/2015	19:30	0.00	1.03	213.33	0.07	97.67
28/06/2015	19:45	0.00	1.23	256.23	0.00	99.67
28/06/2015	20:00	0.00	0.92	248.50	-0.33	99.67
28/06/2015	20:15	0.00	0.85	260.13	-0.67	100.67
28/06/2015	20:30	0.00	1.30	250.93	-0.87	101.00
28/06/2015	20:45	0.00	1.59	228.27	-0.70	101.67
28/06/2015	21:00	0.00	1.74	235.20	-0.50	102.00
28/06/2015	21:15	0.00	1.42	243.53	-0.60	102.00
28/06/2015	21:30	0.00	1.55	249.23	-0.33	102.67
28/06/2015	21:45	0.00	1.42	244.90	-0.13	102.67
28/06/2015	22:00	0.00	0.86	255.20	-0.43	103.00
28/06/2015	22:15	0.00	0.83	259.27	-0.60	103.00
28/06/2015	22:30	0.00	0.89	227.03	-0.43	103.00
28/06/2015	22:45	0.00	1.50	232.50	-0.13	102.33
28/06/2015	23:00	0.00	1.44	222.17	-0.23	102.00
28/06/2015	23:15	0.00	1.34	244.03	-0.33	102.00
28/06/2015	23:30	0.00	0.61	141.23	-0.53	102.00
28/06/2015	23:45	0.00	0.29	158.07	-0.83	102.00
29/06/2015	0:00	0.00	0.20	221.97	-0.90	103.00

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
29/06/2015	0:15	0.00	0.75	170.87	-0.83	103.00
29/06/2015	0:30	0.00	0.23	180.33	-0.40	103.00
29/06/2015	0:45	0.00	0.32	265.30	-0.13	102.00
29/06/2015	1:00	0.00	1.06	251.63	0.57	102.00
29/06/2015	1:15	0.00	1.28	247.37	0.97	102.00
29/06/2015	1:30	0.00	1.07	253.70	0.60	102.00
29/06/2015	1:45	0.00	0.40	246.00	0.07	102.00
29/06/2015	2:00	0.00	0.55	267.67	-0.33	102.00
29/06/2015	2:15	0.00	0.97	230.37	-0.90	102.00
29/06/2015	2:30	0.00	1.08	254.33	-0.47	101.67
29/06/2015	2:45	0.00	0.71	250.03	-0.40	101.00
29/06/2015	3:00	0.00	0.78	278.20	-0.47	101.00
29/06/2015	3:15	0.00	0.57	244.17	-0.47	101.00
29/06/2015	3:30	0.00	0.99	251.67	-0.30	100.67
29/06/2015	3:45	0.00	0.58	203.77	-0.20	100.00
29/06/2015	4:00	0.00	0.96	26.57	-0.67	100.00
29/06/2015	4:15	0.00	0.89	88.80	-0.50	100.00
29/06/2015	4:30	0.00	0.94	235.80	0.03	99.33
29/06/2015	4:45	0.00	1.34	223.43	0.53	99.00
29/06/2015	5:00	0.00	1.40	246.13	0.93	98.00
29/06/2015	5:15	0.00	1.14	225.30	1.37	97.00
29/06/2015	5:30	0.00	0.84	175.67	0.47	97.00
29/06/2015	5:45	0.00	1.19	21.23	-0.33	97.00
29/06/2015	6:00	0.00	0.85	154.40	-0.67	97.00
29/06/2015	6:15	0.00	0.70	45.83	-0.77	97.00
29/06/2015	6:30	0.00	0.85	94.63	-0.73	96.00
29/06/2015	6:45	0.00	0.90	242.27	-0.50	96.00
29/06/2015	7:00	0.00	0.96	216.23	0.20	95.00
29/06/2015	7:15	0.00	1.42	221.90	0.50	94.00
29/06/2015	7:30	0.00	0.61	222.07	0.43	94.00
29/06/2015	7:45	0.00	0.69	243.63	0.33	93.67
29/06/2015	8:00	0.00	0.65	144.83	1.53	92.00
29/06/2015	8:15	0.00	0.67	112.00	1.60	91.00
29/06/2015	8:30	0.00	0.71	187.37	1.93	90.67
29/06/2015	8:45	0.00	0.64	227.47	3.50	88.00
29/06/2015	9:00	0.00	0.77	228.83	5.00	85.00

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
29/06/2015	9:15	0.00	0.98	283.80	5.93	82.67
29/06/2015	9:30	0.00	1.88	262.37	6.70	80.67
29/06/2015	9:45	0.00	1.87	99.00	7.27	78.00
29/06/2015	10:00	0.00	2.20	85.53	8.40	70.00
29/06/2015	10:15	0.00	1.85	67.40	8.90	58.67
29/06/2015	10:30	0.00	2.15	52.77	9.60	51.67
29/06/2015	10:45	0.00	2.68	45.87	10.03	47.67
29/06/2015	11:00	0.00	2.60	65.87	10.57	47.67
29/06/2015	11:15	0.00	2.61	53.80	10.77	51.00
29/06/2015	11:30	0.00	2.48	89.47	11.20	56.33
29/06/2015	11:45	0.00	2.98	44.77	11.40	64.67
29/06/2015	12:00	0.00	2.49	50.47	11.67	65.67
29/06/2015	12:15	0.00	2.32	43.60	11.60	69.33
29/06/2015	12:30	0.00	3.02	117.80	11.93	69.33
29/06/2015	12:45	0.00	2.24	102.13	12.13	69.33
29/06/2015	13:00	0.00	1.25	158.83	11.97	72.33
29/06/2015	13:15	0.00	2.16	85.03	12.27	72.00
29/06/2015	13:30	0.00	1.67	73.20	12.37	72.67
29/06/2015	13:45	0.00	1.76	80.73	12.23	73.67
29/06/2015	14:00	0.00	1.57	226.10	12.90	72.00
29/06/2015	14:15	0.00	2.01	232.83	12.57	71.00
29/06/2015	14:30	0.00	2.28	283.57	12.43	71.33
29/06/2015	14:45	0.00	2.31	213.20	12.13	70.00
29/06/2015	15:00	0.00	2.20	294.13	11.70	73.67
29/06/2015	15:15	0.00	1.88	209.23	11.43	74.67
29/06/2015	15:30	0.00	1.37	289.53	11.30	74.00
29/06/2015	15:45	0.00	1.41	286.87	11.20	74.33
29/06/2015	16:00	0.00	1.48	324.57	11.17	75.00
29/06/2015	16:15	0.00	0.69	277.90	10.80	77.33
29/06/2015	16:30	0.00	0.20	315.33	8.33	86.33
29/06/2015	16:45	0.00	1.36	255.63	6.63	94.00
29/06/2015	17:00	0.00	1.28	238.53	6.10	96.33
29/06/2015	17:15	0.00	1.56	252.20	5.00	98.67
29/06/2015	17:30	0.00	1.44	240.47	4.33	100.00
29/06/2015	17:45	0.00	1.48	246.10	3.90	101.00
29/06/2015	18:00	0.00	1.56	247.40	4.00	101.00

Date	Time	Rainfall (mm)	Wind Speed 10m above ground (m/s)	Wind Direction (deg.)	Temp (°C)	Relative humidity (%)
29/06/2015	18:15	0.00	1.49	241.90	3.47	101.00
29/06/2015	18:30	0.00	1.47	243.43	3.13	101.00
29/06/2015	18:45	0.00	1.61	252.67	3.57	101.00
29/06/2015	19:00	0.00	1.49	243.67	3.23	100.67
29/06/2015	19:15	0.00	1.39	242.33	2.90	100.67
29/06/2015	19:30	0.00	1.47	246.30	3.03	100.00
29/06/2015	19:45	0.00	1.31	241.77	3.20	100.33
29/06/2015	20:00	0.00	1.58	234.57	2.20	101.33
29/06/2015	20:15	0.00	1.61	233.43	2.20	101.00
29/06/2015	20:30	0.00	1.34	238.10	3.13	101.33
29/06/2015	20:45	0.00	1.11	243.77	3.30	101.00
29/06/2015	21:00	0.00	1.08	242.10	3.87	101.00
29/06/2015	21:15	0.00	0.74	249.43	3.90	100.33
29/06/2015	21:30	0.00	0.28	211.53	4.10	100.00
29/06/2015	21:45	0.00	0.73	347.10	3.73	100.00
29/06/2015	22:00	0.00	0.78	335.03	2.97	100.00
29/06/2015	22:15	0.00	0.48	256.83	2.67	100.00
29/06/2015	22:30	0.00	0.71	245.33	2.07	100.00
29/06/2015	22:45	0.00	1.11	245.17	1.73	100.00
29/06/2015	23:00	0.00	1.36	232.83	1.67	100.00
29/06/2015	23:15	0.00	1.25	240.97	1.33	100.00
29/06/2015	23:30	0.00	1.08	232.63	0.97	100.00
29/06/2015	23:45	0.00	1.28	236.00	1.33	99.33



Aurecon Australasia Pty Ltd

ABN 54 005 139 873

Level 5, 116 Military Road

Neutral Bay NSW 2089

PO Box 538

Neutral Bay NSW 2089

Australia

T +61 2 9465 5599

F +61 2 9465 5598

E sydney@aurecongroup.com

W aurecongroup.com

Aurecon offices are located in:

Angola, Australia, Botswana, Chile, China,
Ethiopia, Ghana, Hong Kong, Indonesia,
Lesotho, Libya, Malawi, Mozambique,
Namibia, New Zealand, Nigeria,
Philippines, Qatar, Singapore, South Africa,
Swaziland, Tanzania, Thailand, Uganda,
United Arab Emirates, Vietnam, Zimbabwe.