

GROUNDWATER, SURFACE WATER, DEPOSITIONAL DUST,

HVAS AND METEOROLOGICAL MONITORING


Prepared for Pine Dale Mine Community Consultative Committee

Prepared by RCA Australia

RCA ref 6880-822/0

April 2013



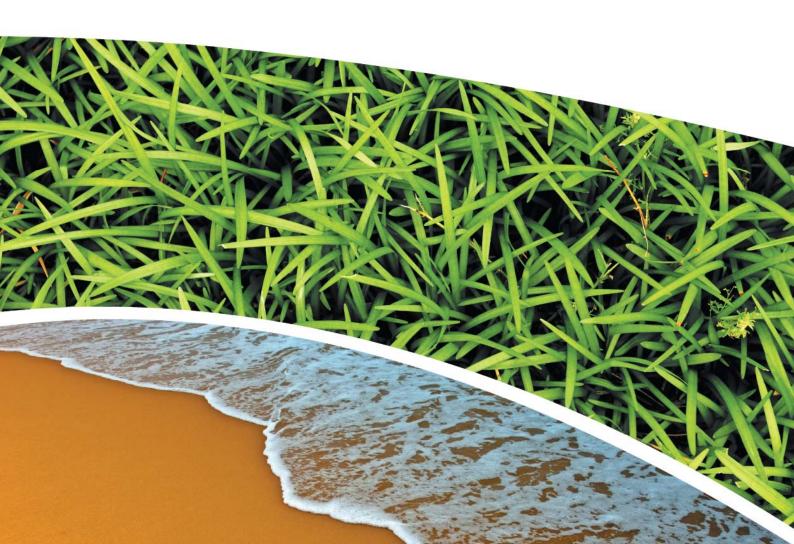

RCA AUSTRALIA

ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200 Facsimile: +61 2 4902 9299 Email: administrator@rca.com.au Internet: www.rca.com.au

This document is and shall remain the property of RCA Australia. The document may only be used for the purpose for which it was commissioned and in accordance with the Terms of Engagement for the commission supplied at the time of proposal. Unauthorised use of this document in any form whatsoever is prohibited.

DOCUMENT STATUS								
Rev				Approved for Issue (Project Manager)				
No	Comment	Comment Author Reviewer	Reviewer	Name	Signature	Date		
/0	Final	K Shaw	K Tripp	K Tripp	XT	13/6/13		

	DOCUMENT DISTRIBUTION							
Rev No	Copies	s Format Issued to						
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	13/6/13				
/0	1	Electronic (email)	EnergyAustralia – Tom Hurdley tom.hurdley@energyaustralia.com.au	13/6/13				
/0	1	Electronic (email)	EnergyAustralia- Mark Frewin mark.frewin@energyaustralia.com.au	13/6/13				
/0	1	Electronic (email)	Lithgow City Council – Andrew Muir andrew.muir@lithgow.nsw.gov.au	13/6/13				
/0	1	Bound report	Pine Dale Mine – Graham Goodwin PO Box 202, Wallerawang NSW 2845	13/6/13				
/0	1	Electronic report	RCA – job archive	13/6/13				



RCA LE ref 6880-822/0

13 June 2013

Pine Dale Mine PO Box 202 WALLERAWANG NSW 2845

Attention: Mr Graham Goodwin

REPORT COMPILED FOR PINE DALE MINE COMMUNITY CONSULTATIVE COMMITTEE DETAILING GROUND WATER, DEPOSITIONAL DUST HVAS AND METEOROLOGICAL MONITORING APRIL 2013

1 GENERAL COMMENTS

Job Number: 6880.

Date Samples Received: During the month of April 2013.

Samples received were sampled by RCA Laboratories – Environmental staff.

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**. When an external testing laboratory is used to obtain the analysis of samples which become a part of this report, then the details of that laboratory's official report will be attached in an Appendix.

 Table 1
 Analytical Test Methods

ANALYSIS	METHOD	UNITS	ANALYSING LABORATORY	NATA / NON- NATA ANALYSIS
Determination of Suspended Particulate Matter	ENV-LAB003	μg/m³	RCA Laboratories - Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m²/month	RCA Laboratories - Environmental	NATA Analysis
рН	ENV-LAB006	рН	RCA Laboratories - Environmental	NATA Analysis
Conductivity	ENV-LAB010	μS/cm	RCA Laboratories - Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories - Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, CI, SO ₄)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

3 WATER ANALYSIS RESULTS

3.1 GROUNDWATER

A total of 5 on-site groundwater samples were collected during the month of April 2013. No sample was collected from groundwater monitoring location P4 as the bore did not contain sufficient water to sample. Water quality analysis results are shown in **Table 2**.

 Table 2
 Groundwater Analysis Results

ANALYSIS	UNITS	P2	P3	P6	P7	P7a
Sample Number		04136880019	04136880020	04136880010	04136880021	04136880022
Date Sampled	-	22/04/2013	22/04/2013	22/04/2013	22/04/2013	22/04/2013
Time Sampled	-	17:20	17:14	16:00	16:15	16:20
Standing Water Level	m	5.10	5.78	26.81	7.69	5.76
Standpipe Height	m	0.95	0.66	0.95	1.00	0.90
Relative Standing Water Level*	m	4.15	5.12	25.86	6.69	4.86
рН	pH unit	5.1	4.8	6.9	6.9	6.8
Conductivity	μS/cm	241	604	1000	779	847
Bicarbonate Alkalinity	mg/L	<1	<1	48	197	202
Total Alkalinity	mg/L	<1	<1	48	197	202
Sulphate	mg/L	82	227	448	76	47
Chloride	mg/L	7	11	18	96	136
Calcium	mg/L	10	34	104	44	52
Magnesium	mg/L	8	26	46	49	51
Sodium	mg/L	14	27	31	44	45
Potassium	mg/L	4	8	20	9	12
Iron	mg/L	1.22	2.83	11.6	<0.05	2.14

NOTES: *Depth relative to ground level (not standpipe height).

Groundwater monitoring locations are shown in **Appendix 1**.



3.2 EPA SURFACE WATER MONITORING

Routine quarterly surface waters were not scheduled to be monitored this month. Quarterly surface water monitoring is next scheduled to be undertaken in May 2013.

4 AIR QUALITY MONITORING RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

HVAS at this facility conform to AS/NZS 3580.9.3:2003, AS/NZS 3580.9.6:2003 and AS/NZS 3580.1.1:2007.

HVAS Total Suspended Particulate analysis results are shown in **Table 4**;

PM₁₀ Suspended Particulate Matter results are shown in **Table 5**.

Table 4 Total Suspended Particulates (μg/m³ 0°C 101.3 kPa)

RUN DATE	TSP (µg/m³)	SAMPLE NUMBER	FILTER NUMBER	DATE FILTER OFF	TIME FILTER OFF	FIELD TECH	HOURS RUN
03-Apr-13	13	04136880043	8606002	05-Apr-13	12:50	Client	24.00
09-Apr-13	13	04136880045	8698261	11-Apr-13	11:05	Client	24.00
15-Apr-13	45	04136880047	8698263	17-Apr-13	11:25	Client	24.02
21-Apr-13	22	04136880049	8698265	23-Apr-13	7:50	Client	24.02
27-Apr-13	35	04136880051	8698267	29-Apr-13	14:10	K Hawes	24.00

Table 5 Suspended Particulate Matter PM₁₀ (μg/m³ 0°C 101.3 kPa)

RUN DATE	PM ₁₀ (μg/m³)	SAMPLE NUMBER	FILTER NUMBER	DATE FILTER OFF	TIME FILTER OFF	FIELD TECH	HOURS RUN
03-Apr-13	8	04136880044	8606003	05-Apr-13	12:50	Client	24.00
09-Apr-13	4	04136880046	8698262	11-Apr-13	11:05	Client	24.00
15-Apr-13	30	04136880048	8698264	17-Apr-13	11:25	Client	24.00
21-Apr-13	5	04136880050	8698266	23-Apr-13	7:56	Client	24.01
27-Apr-13	18	04136880052	8698268	29-Apr-13	14:10	K Hawes	24.00

4.1.1 Allowable TSP Limits

The EPA Annual Mean TSP allowable limit is $90\mu g/m^3$. All TSP HVAS results recorded during this monitoring period are in compliance with consent conditions, as the *current rolling annual mean* (from May 2012 to April 2013) for the TSP unit is $25.3\mu g/m^3$, which is well below the allowable limit of $90\mu g/m^3$.



4.1.2 Allowable PM₁₀ Limits

The EPA 24h Maximum PM_{10} allowable limit is $50\mu g/m^3$. The EPA Annual Mean PM_{10} allowable limit is $30\mu g/m^3$. All PM_{10} HVAS results recorded during this monitoring period conform to consent conditions, as the *current rolling annual mean* for the PM_{10} unit is $11.8\mu g/m^3$, which is below the allowable limit of $30\mu g/m^3$. The 24 hour maximum allowable limit of $50\mu g/m^3$ was not exceeded on any run day during the April 2013 monitoring period.

4.1.3 Comments

HVAS monitoring locations are shown in **Appendix 1**.

Graphical HVAS results presentations are shown in **Appendix 2**.



4.2 DEPOSITIONAL DUST

Depositional Dust Gauges at this facility conform to AS/NZS 3580.10.1:2003 and AS/NZS 3580.1.1:2007. Depositional Dust monitoring results are shown in **Table 6**.

 Table 6
 Depositional Dust Monitoring - Deposited Matter April 2013

SAMPLE NO	DEPOSIT GAUGE	DATE SAMPLE STARTED	DATE SAMPLE COMPLETED	NO OF DAYS	NOTES	INSOLUBLE SOLIDS (g/m²/month)	ASH (g/m²/month)	COMBUSTIBLE MATTER (g/m²/month)
04136880033	D1	20/03/2013	22/04/2013	33*	IT	0.8	0.3	0.5
04136880034	D2	20/03/2013	22/04/2013	33*	I	0.7	0.3	0.4
04136880035	D3	20/03/2013	22/04/2013	33*	IT	0.7	0.4	0.3
04136880036	D4	20/03/2013	22/04/2013	33*	I	0.6	0.3	0.3
04136880037	D5	20/03/2013	22/04/2013	33*	I	0.4	0.2	0.2
04136880038	D6	20/03/2013	22/04/2013	33*	I	0.3	0.2	0.1

^{*}Please note that insoluble solids, ash residue and combustible matter are calculated based on a 30 day month as per Australian Standard 3580.10.1. Exposure days are taken into consideration as a variable when conducting this calculation and producing results in g/m²/month.

4.2.1 Glossary of Terms Used in Notes

I Insects (e.g. ants, spiders) IT Insects (e.g. ants, spiders) & Tree Litter (e.g. twigs, leaves, gumnuts)

4.2.2 Allowable Depositional Dust Limits

The EPA Long Term (Annual Average) Dust Limit is 4g/m² per month. All Depositional Dust results during this monitoring period are in compliance with consent conditions. The Annual Average for Dust Gauges D1, D2, D3, D4, D5 and D6 are all less than 1.0g/m² per month, which is below the allowable Annual Average Long Term Limit of 4g/m² per month. During this period, gauges were exposed for 33 days. Results are based on a 30-day month and the exposure exceedance has been factored into the equation during calculation, therefore it is still possible to deem the results for April accurate and reliable.

Depositional Dust monitoring locations are shown in **Appendix 1**.



Graphical Depositional Dust results are shown in Appendix 2.

4.3 BLASTING

Blasting results for the month of March are shown in **Table 7**.

 Table 7
 Blasting Results- Airblast Overpressure (dB) and Ground Vibration (mm/sec)

	P	ark	Noon	St.	Summer St.					
Date	Overpressure (dB)	Vibration (mm/sec)	Overpressure (dB)	Vibration (mm/sec)	Overpressure (dB)	Vibration (mm/sec)				
5/04/2013	NT	NT	111.6	2.21	107.4	2.17				
11/04/2013	NT	NT	105.0	1.94	106.8	2.07				
17/04/2013	NT	NT	91.2	0.08	NT	NT				
	2012- 2013 Year to Date Information									
Minimum	103.9	0.32	91.2	0.08	95.7	0.10				
Average	111.3	2.30	108.6	1.30	108.7	1.50				
Maximum	114.6	3.87	114.4	2.69	116.3	4.58				
% > EPL 95% Compliance Criteria	0.0%	0.0%	0.0%	0.0%	2.6%	0.0%				
% > EPL 100% Compliance Criteria	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%				

Notes: NT No Trigger. Blast monitoring unit was not triggered during the blast.



4.3.1 Allowable Blasting Limits

Conditions of EPL 4911 state that in relation to airblast overpressure levels a result of greater than 115dB must not be observed at any noise sensitive location for more than 5% of the total number of blasts over each annual reporting period. All blasts within the annual reporting period (100% of blasts) are not to exceed the compliance criteria of 120dB. Ground vibration peak velocity levels must not exceed 5mm/sec for 95% of blasts, whilst an intensity of 10mm/sec must not be exceeded by any blast during the reporting period. The reporting period runs as a rolling 12-month average from May 2012 to April 2013.

During April 2013, there were nil exceedances of the EPL conditions for both overpressure and vibration levels. For the rolling annual average, there have been zero blasts which have exceeded the 100% compliance conditions of 120dB and 10mm/sec for overpressure and vibration respectively. The overpressure and vibration criteria of 115dB and 5mm/sec, respectively, have not been exceeded for more than 5% of the blasts during the reporting period.

Graphical blasting results from overpressure and vibration are presented in Appendix 2.

5 OPERATIONAL ACTIVITIES

Throughout April 2013 production at Pine Dale Mine has been concentrated in Blocks 6, 7 and 8 within strips 9 and 10.

Relatively low rainfall was observed throughout the month, 27.0 mm total, which predominantly fell on the 16th of the month and therefore production materials targets have been achieved this month. In total 150,000 tonnes of overburden were excavated and 30,000 tonnes of coal delivered to Mt Piper Power Station. Operations this month were principally undertaken with the use of two excavators and three trucks.

At present, due to the warmer than average weather being observed, Purple Copper Butterfly monitoring is continuing.

6 SUMMARY

During the month of April 2013 all environmental monitoring constituents were found to be in compliance with EPL 4911.

Quarterly surface waters were not scheduled to be sampled this month. Surface water Quality monitoring is next scheduled to be undertaken in May 2013.

Rolling annual averages from both the TSP and PM_{10} High Volume Air Samplers are currently well below the EPA Annual Mean TSP and PM_{10} criterion of $90\mu g/m^3$ and $30\mu g/m^3$ respectively. There were zero exceedances of the PM_{10} short term impact assessment criteria of $50\mu g/m^3$ over twenty-four hours during April 2013.

Currently there are no depositional dust gauge results which are greater than the EPA Long Term (annual average) criteria of 4g/m²/month based upon a rolling average of the past 12 months.



During April there were nil exceedances of the blasting requirements documented in the Pine Dale Mine EPL. During the previous twelve month reporting period, there were nil non-conformance's based upon the 95% or 100% limits for either overpressure or vibration levels.

This report must not be reproduced except in full. Results or figures from this report must not be used without acknowledgment.

Please contact the undersigned if you have any queries.

Yours sincerely

Katy Shaw

Environmental Scientist RCA Australia Pty Ltd trading as


RCA Australia Pty Ltd trading as
RCA Laboratories – Environmental

Karen Tripp Senior Environmental Scientist/Hygienist RCA Australia Pty Ltd trading as RCA Laboratories – Environmental


A/nP

Appendix 1

Groundwater and Air Quality Monitoring Locations

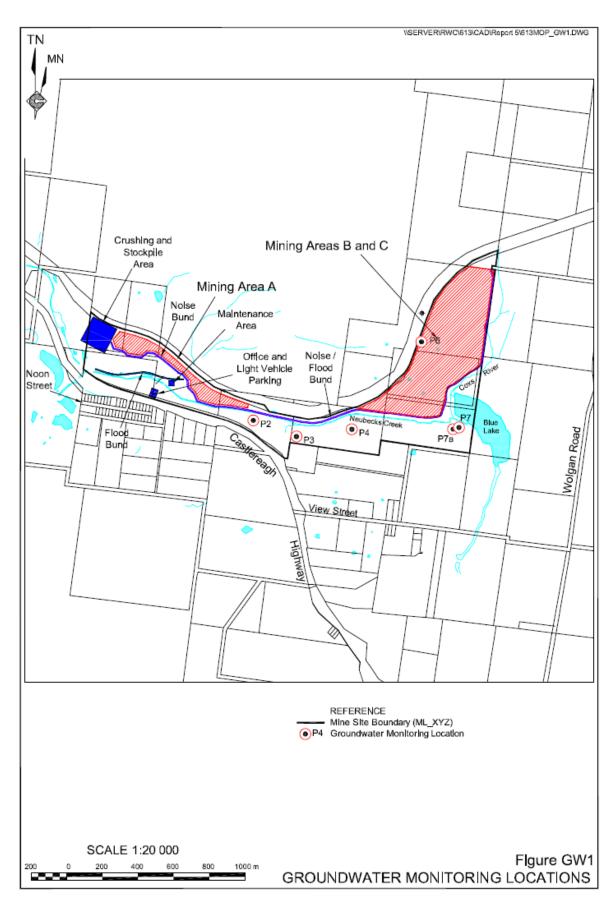





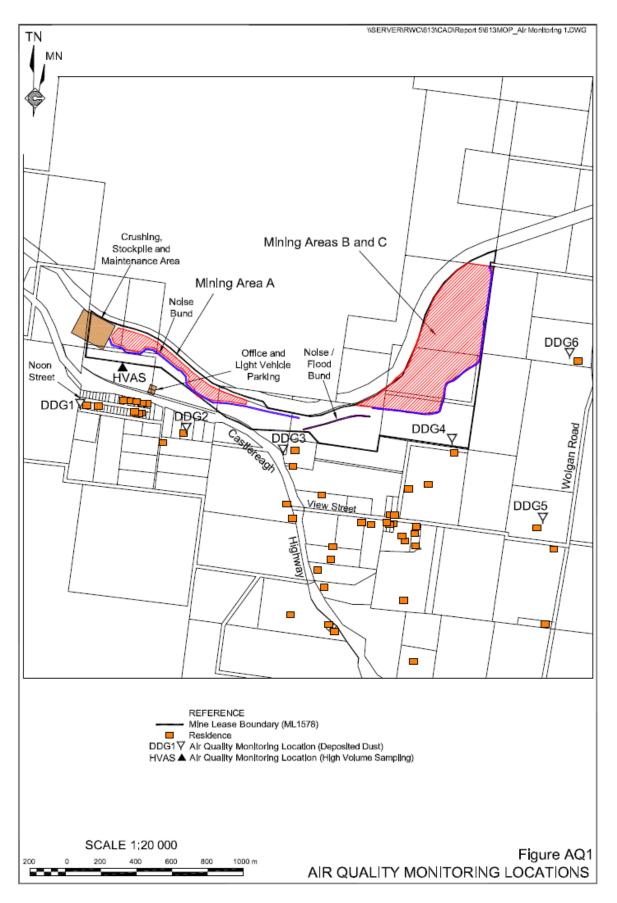



Appendix 2


Depositional Dust, HVAS and Blast Result Graphs

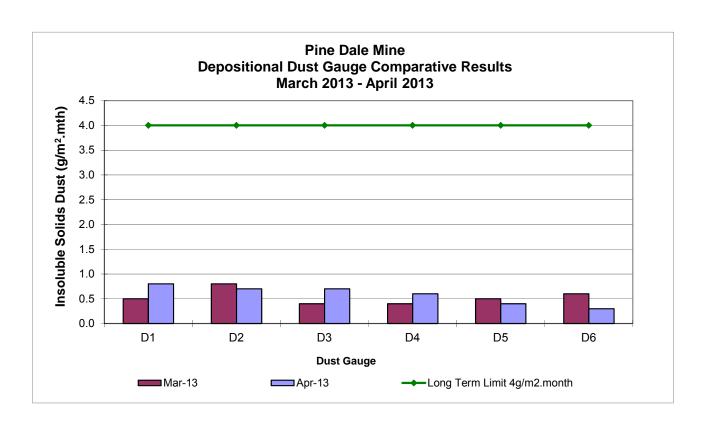


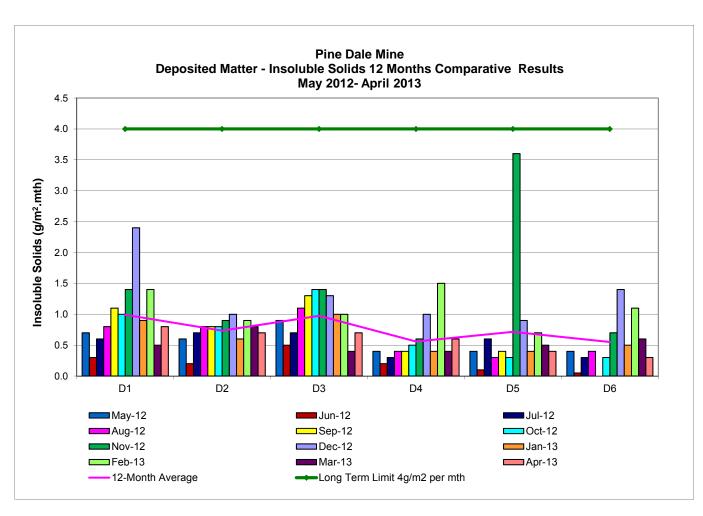

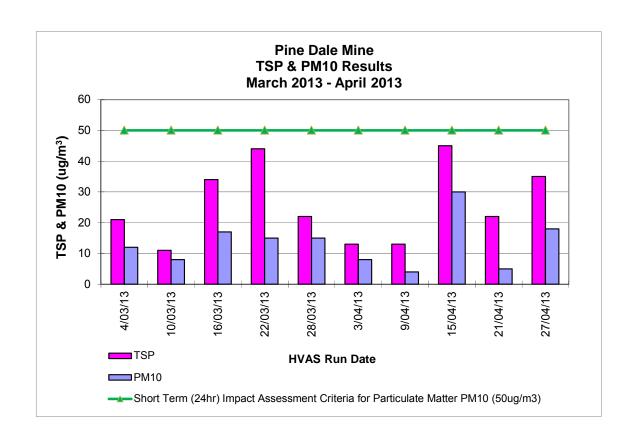

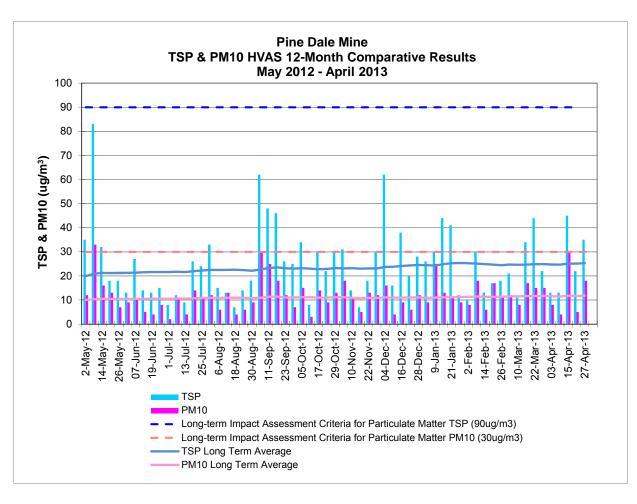


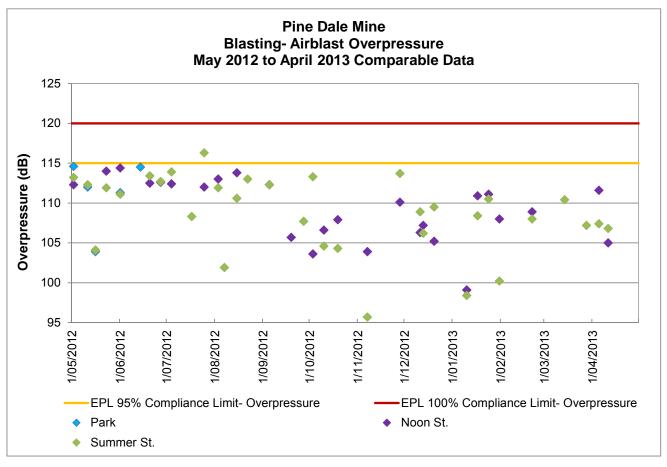


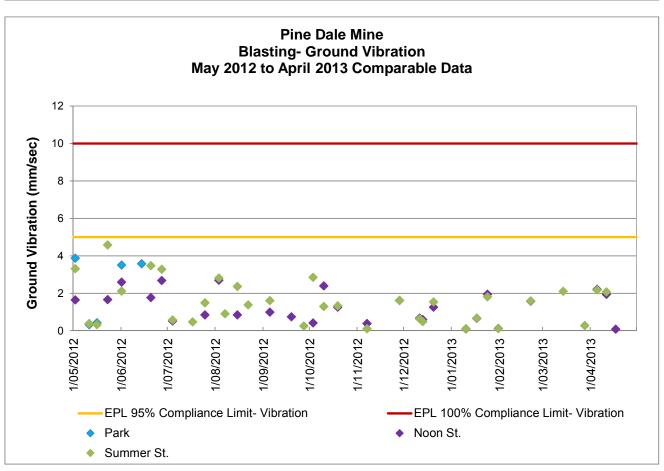

Appendix 3

Meteorological Data

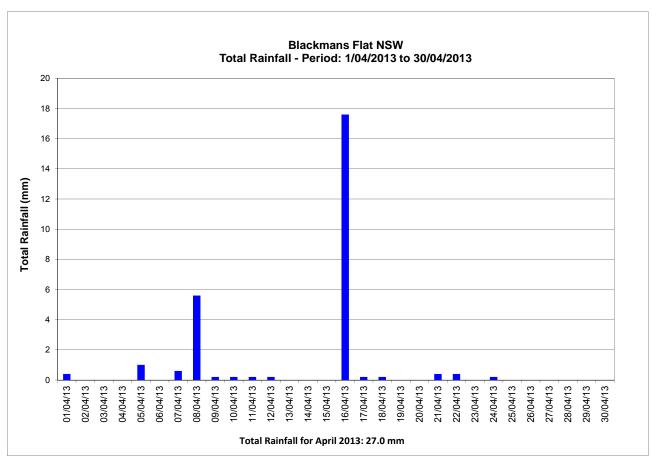

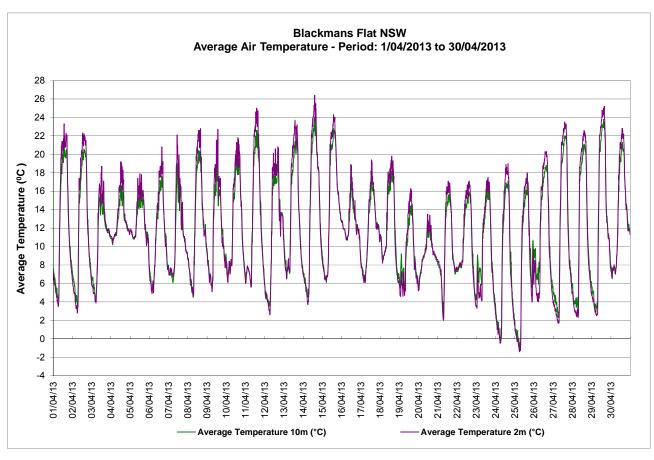

Bin1: 0 - 3 m/s Bin2: 3 - 6 m/s Bin3: 6 - 9 m/s Bin4: 9 - 12 m/s Bin5: 12 - 15 m/s Bin6: 15 - 18 m/s Bin7: 18 - 21 m/s Bin8: 21 - 24 m/s Bin9: 24+ m/s

Blackman's Flat Windrose

