


AIR, WATER AND METEOROLOGICAL MONITORING – JANUARY 2019
PINE DALE MINE, BLACKMANS FLAT

Prepared for Pine Dale Mine Community Consultative Committee

Prepared by RCA Australia

RCA ref 6880-1789/0



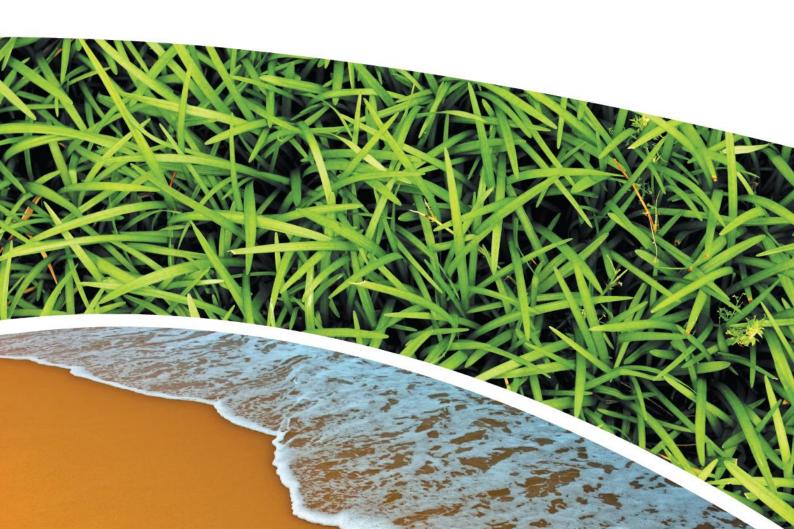

RCA AUSTRALIA

ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200 Facsimile: +61 2 4902 9299 Email: administrator@rca.com.au Internet: www.rca.com.au

This document is and shall remain the property of RCA Australia. The document may only be used for the purpose for which it was commissioned and in accordance with the Terms of Engagement. Unauthorised use of this document in any form whatsoever is prohibited.

DOCUMENT STATUS								
Rev	Comment	Author	Reviewer	Approved for Issue (Project				
No	Comment	Addioi	Reviewer	Name	Signature	Date		
/0	Final	C Rocher	Z Laughlan	C Rocher	Row	15.02.2019		

DOCUMENT DISTRIBUTION								
Rev No	Copies Format Issued to							
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	15.02.2019				
/0	1	Electronic (email)	Energy Australia- Mark Frewin mark.frewin@energyaustralia.com.au	15.02.2019				
/0	1	Electronic (email)	Lithgow City Council – Andrew Muir andrew.muir@lithgow.nsw.gov.au	15.02.2019				
/0	1	Electronic report	RCA – job archive	15.02.2019				





Contents

1	INTR	RODUCTION	1
2	ANA	LYTICAL PROCEDURES	1
3	WAT	ER MONITORING RESULTS	2
	3.1 3.2	GROUNDWATERSURFACE WATER MONITORING	
4	AIR (QUALITY RESULTS	4
	4.1 4.2	HIGH VOLUME AIR SAMPLERS (HVAS)	5 5
5	MET	EOROLOGICAL MONITORING	6
6	BLA	STING RESULTS	6
7	NOIS	SE MONITORING RESULTS	6
8	OPE	RATIONAL ACTIVITIES	6
9		MARY	

APPENDIX A

MONITORING LOCATIONS

APPENDIX B

DEPOSITIONAL DUST AND HVAS GRAPHS

APPENDIX C

METEOROLOGICAL DATA



RCA ref 6880-1789/0

15 February 2019

Enhance Place Pty Ltd PO Box 202 WALLERWANG NSW 2845

Attention: Mr Graham Goodwin

Geotechnical Engineering

Engineering Geology

Environmental Engineering

Hydrogeology

Construction Materials Testing

Environmental Monitoring

Sound & Vibration

Occupational Hygiene

REPORT COMPILED FOR COMMUNITY CONSULTATIVE COMMITTEE DETAILING AIR, WATER AND METEOROLOGICAL MONITORING AT PINE DALE MINE JANUARY 2019

1 INTRODUCTION

This report presents the results of air, water and meteorological monitoring undertaken at Pine Dale Mine, Blackmans Flat during the month of January 2019.

Air and water samples were collected by RCA Laboratories – Environmental staff. Meteorological data was obtained from the site weather station.

This report satisfies the requirements to monitor environmental parameters as presented in the Pine Dale Mine Environmental Protection Licence (EPL 4911).

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental (NATA Accreditation number 9811) are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**.

 Table 1
 Analytical Test Methods

Analysis	Method	Units	Analysing Laboratory	NATA Accreditation Status
Determination of Suspended Particulate Matter	ENV-LAB003	μg/m³	RCA Laboratories – Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m ² .month	RCA Laboratories – Environmental	NATA Analysis
рН	ENV-LAB006	рН	RCA Laboratories – Environmental	NATA Analysis
Conductivity	ENV-LAB010	μS/cm	RCA Laboratories – Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories – Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, Cl, SO ₄)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

ALS Environmental has been used to obtain analysis of anions, cations and dissolved metals (NATA Accreditation number 825).

3 WATER MONITORING RESULTS

3.1 GROUNDWATER

Groundwater monitoring was undertaken at two (2) on-site groundwater bores within the Pine Dale Mine during January 2019. Water quality analysis results are shown in **Table 2**. Groundwater monitoring locations are shown in **Appendix A**.



 Table 2
 Groundwater Analysis Results

Analysis	Units	P6	P7			
Sample Number	-	01196880009	01196880011			
Date Sampled	-	07/01/2019	07/01/2019			
Time Sampled	-	15:14	17:35			
Depth to Water from Surface	m	25.46	6.72			
Water Level (AHD)	m	891.49	887.68			
Temperature	°C	17.3	16.7			
рН	рН	5.99	6.29			
Conductivity	μS/cm	1790	863			
Turbidity	NTU	63				
Dissolved Oxygen	mg/L	2.00				
Total Suspended Solids	mg/L	78				
Oil and Grease	mg/L	<5				
Bicarbonate Alkalinity (CaCO ₃)	mg/L	60				
Total Alkalinity (CaCO ₃)	mg/L	60				
Sulphate (as SO ₄)	mg/L	740				
Chloride	mg/L	48				
Calcium	mg/L	158				
Magnesium	mg/L	72				
Sodium	mg/L	71				
Potassium	mg/L	22				
Cobalt (dissolved)	mg/L	0.064				
Manganese (dissolved)	mg/L	3.03				
Nickel (dissolved)	mg/L	0.106				
Zinc (dissolved)	mg/L	0.036				
Iron (dissolved)	mg/L	40.2				
Trigger Levels						
pH trigger level ^	pН	6.2 – 8.0	6.3 – 8.0			
Conductivity trigger level	μS/cm	1180	852			
Water Level (AHD) #	m	887.90	883.28			

Indicates analysis was not required.

Results shown in *bold italics* indicates exceedance of trigger level.



[^] pH trigger level is exceeded if the pH is outside the nominated range

[#] Water Level trigger is exceeded if the AHD water level drops below the nominated trigger level.

3.2 SURFACE WATER MONITORING

Quarterly surface water monitoring was not scheduled to be undertaken in January 2019. The next quarterly monitoring round will be undertaken in February 2019.

4 AIR QUALITY RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

Monitoring of particulate matter less than 10 micrometres (PM₁₀) and total suspended particulates (TSP) is undertaken at Pine Dale Mine using High Volume Air Samplers (HVAS). HVAS at this facility conform to AS/NZS 3580.9.3:2015, AS/NZS 3580.9.6:2015 and AS/NZS 3580.1.1:2016. The locations of these HVAS units are shown in **Appendix A**.

HVAS Total Suspended Particulate results are shown in **Table 3**. PM₁₀ results are shown in **Table 4**. HVAS Monitoring locations are shown in **Appendix A**. Graphical HVAS result presentations are shown in **Appendix B**.



 Table 3
 Total Suspended Particulates (TSP)

Run Date	Date TSP Sample Number		Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
02-Jan-19	38	01196880031	9589218	04-Jan-19	16:21	Client	24.00
08-Jan-19	14	01196880033	9589220	09-Jan-19	9:15	Client	24.54
14-Jan-19	33	01196880035	9589222	16-Jan-19	13:25	Client	24.00
20-Jan-19	12	01196880037	9589294	23-Jan-19	11:53	Client	24.00
26-Jan-19	51	01196880039	9519724	31-Jan-19	6:32	Client	24.00

Table 4 Suspended Particulate Matter < 10 μ m (PM₁₀)

Run Date	PM ₁₀ (μg/m³)	Sample Number	Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
02-Jan-19	22	01196880032	9589219	04-Jan-19	16:23	Client	24.00
08-Jan-19	6	01196880034	9589221	09-Jan-19	9:20	Client	24.34
14-Jan-19	15	01196880036	9589223	16-Jan-19	13:30	Client	24.00
20-Jan-19	4	01196880038	9589295	23-Jan-19	11:55	Client	24.00
26-Jan-19	22	01196880040	9519769	31-Jan-19	6:37	Client	24.00

4.1.1 TSP SUMMARY

The NSW EPA Annual Mean TSP allowable limit is $90\mu g/m^3$. All TSP HVAS results recorded during this monitoring period are in compliance with consent conditions, as the *current rolling annual mean* (February 2018 to January 2019) for the TSP unit is $26.1\mu g/m^3$. The twelve monthly graph is provided in **Appendix B**.

4.1.2 PM₁₀ **SUMMARY**

The NSW EPA twenty four (24) hour maximum PM₁₀ allowable limit is 50μg/m³. The 24 hour maximum allowable limit was not exceeded during January 2019.

The EPA Annual Mean PM₁₀ allowable limit is 25μg/m³. All PM₁₀ HVAS results recorded during this monitoring period conform to consent conditions, as the *current rolling annual mean* for the PM₁₀ unit is 11.9μg/m³, which is below the allowable limit of 25μg/m³.

4.2 DEPOSITIONAL DUST MONITORING

The depositional dust monitoring exposure period for January 2019 was 6 December 2018 – 7 January 2019. Depositional dust gauges at this facility conform to AS/NZS 3580.10.1:2016 and AS/NZS 3580.1.1:2016. Depositional dust monitoring results are shown in **Table 5**. Depositional dust monitoring locations are shown in **Appendix A**.

Depositional dust gauge D2 is situated on private property; this gauge was removed at the request of the property owner in March 2018 and monitoring has therefore ceased at this location.



Table 5 Depositional Dust Monitoring

Deposit Gauge	Number of Days	Notes	Insoluble Solids	Ash	Combustible Matter	Rolling Annual Average
D1	32	IT	3.3	2.2	1.1	3.3
D3	32	I	3.4	2.7	0.7	3.4
D4	32	I	4.2	3.0	1.2	4.2
D5	32	I	4.3	3.2	1.1	4.3
D6	32	I	3.0	2.3	0.7	3.0

All units are g/m²/month

4.2.1 ALLOWABLE DEPOSITIONAL DUST LIMITS

The EPA long term (annual average) deposited dust limit is 4g/m² per month. The rolling annual depositional dust results for all sites within the period (February 2018 – January 2019) are in compliance with consent conditions. Annual average dust concentrations are displayed graphically in **Appendix B**. The annual average for dust gauges D1, D3, D4, D5 and D6 are all less than or equal to 1.4g/m² per month.

5 METEOROLOGICAL MONITORING

Pine Dale Mine records meteorological data continuously via an onsite weather station. Details of the weather data recorded during the period 1 to 31 January 2019 are shown in **Appendix C**.

Data availability during this period was 100%.

6 BLASTING RESULTS

No blasting was undertaken during this month as mining operations have ceased since the end of March 2014.

7 NOISE MONITORING RESULTS

Noise monitoring is required to be undertaken on a quarterly basis. The first quarter monitoring period occurs during January - March 2019. Monitoring is scheduled to be undertaken during February 2019.

8 OPERATIONAL ACTIVITIES

All of the approved minable reserves at the Pine Dale Mine have now been exhausted. Operational mining and the last coal sales ceased as of the end of March 2014.

All former operators have been made redundant; however some statutory positions still remain. Pine Dale Mine has been placed in care and maintenance since April 2014.



I indicates insects noted to be present in sample.

T indicates tree litter in samples (eg. leaves, twigs, gum nuts).

9 SUMMARY

During the month of January 2019 environmental monitoring results were found to be generally in compliance with EPL 4911 with the exception of:

pH was below the site specific lower trigger level in groundwater sample P6 and P7.

Electrical conductivity in groundwater samples P6 and P7 were in excess of the of the site specific trigger level. Rolling annual averages from both the TSP and PM₁₀ High Volume Air Samplers are currently well below the EPA Annual Mean TSP and PM₁₀ criterion of 90µg/m³ and 25µg/m³, respectively.

Currently there are no depositional dust gauge results which are greater than the EPA Long Term (annual average) criteria of 4g/m².month based upon a rolling average of the past 12 months.

Meteorological monitoring was undertaken for the entire month of January with 100% data capture.

Pine Dale Mine ceased operation in March 2014 and therefore no blasting occurred at the site. No noise monitoring was undertaken during January 2019.

This report shall only be presented in full and may not be used to support objectives other than those stated in the report without written permission from RCA Australia.

The information in this report is considered accurate at the date of issue with regard to the current conditions of the site. Conditions can vary across any site that cannot be explicitly defined by investigation.


Yours faithfully


RCA AUSTRALIA

Carmen Rocher
Environmental Engineer

Appendix A


Monitoring Locations

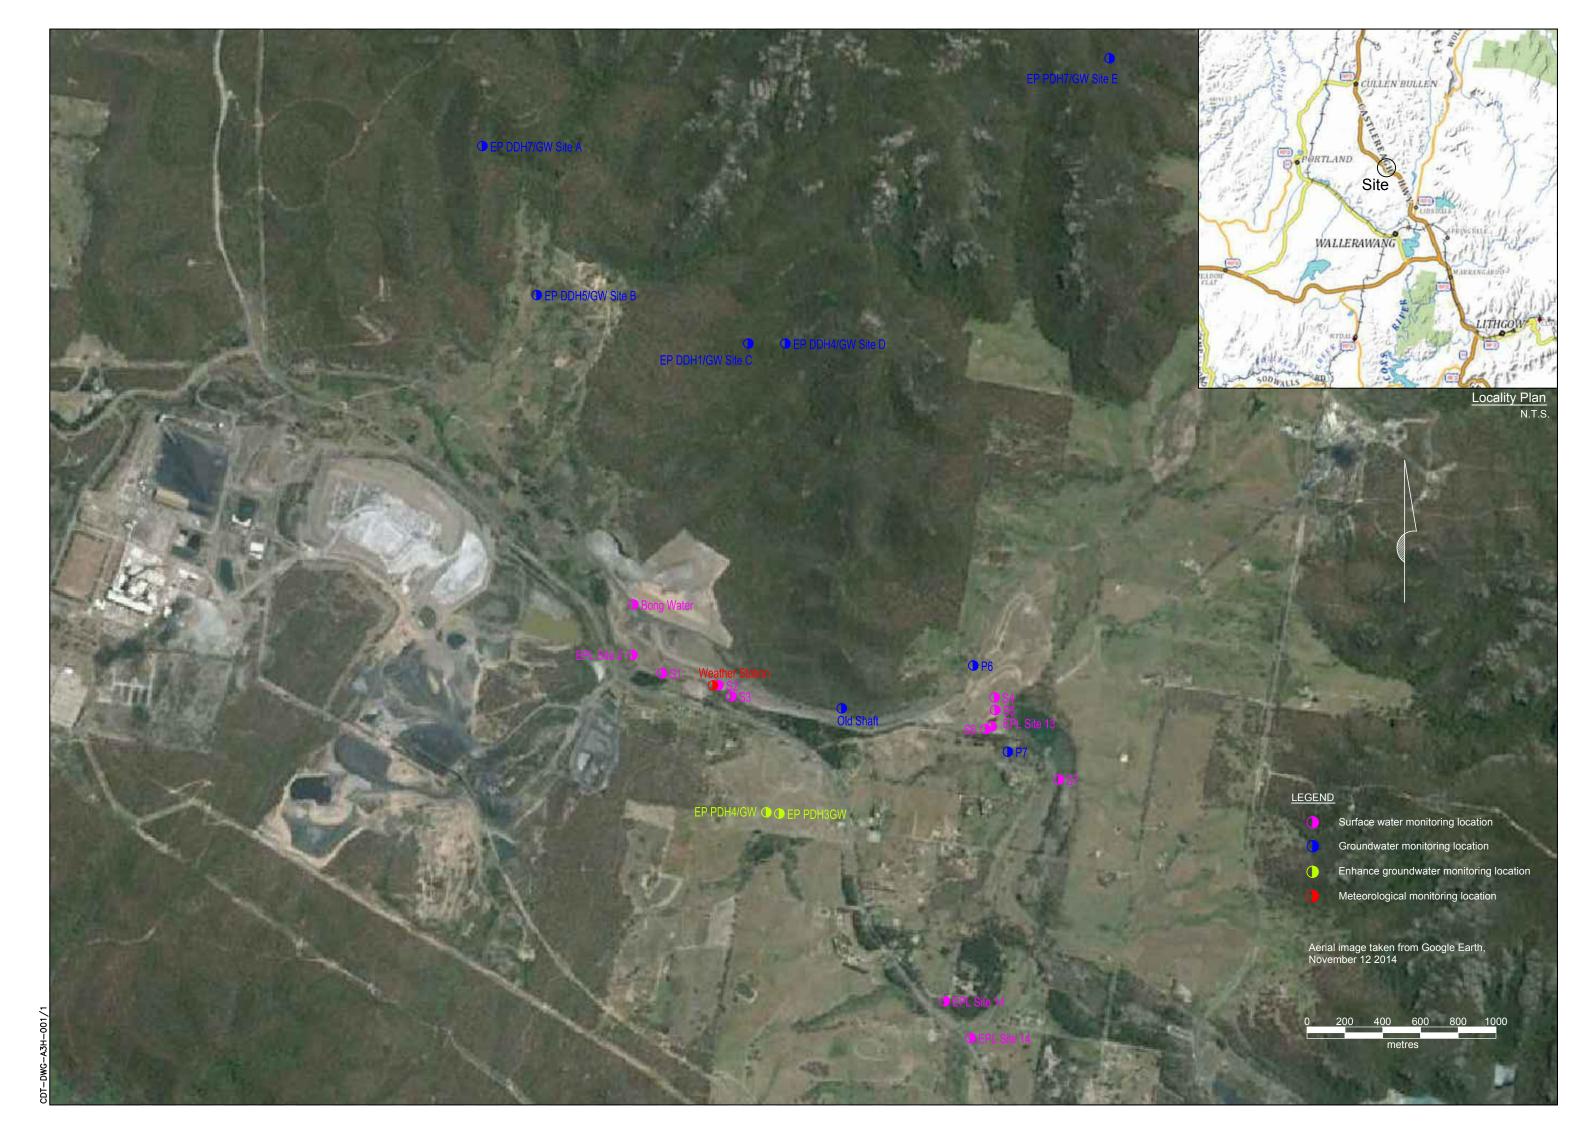


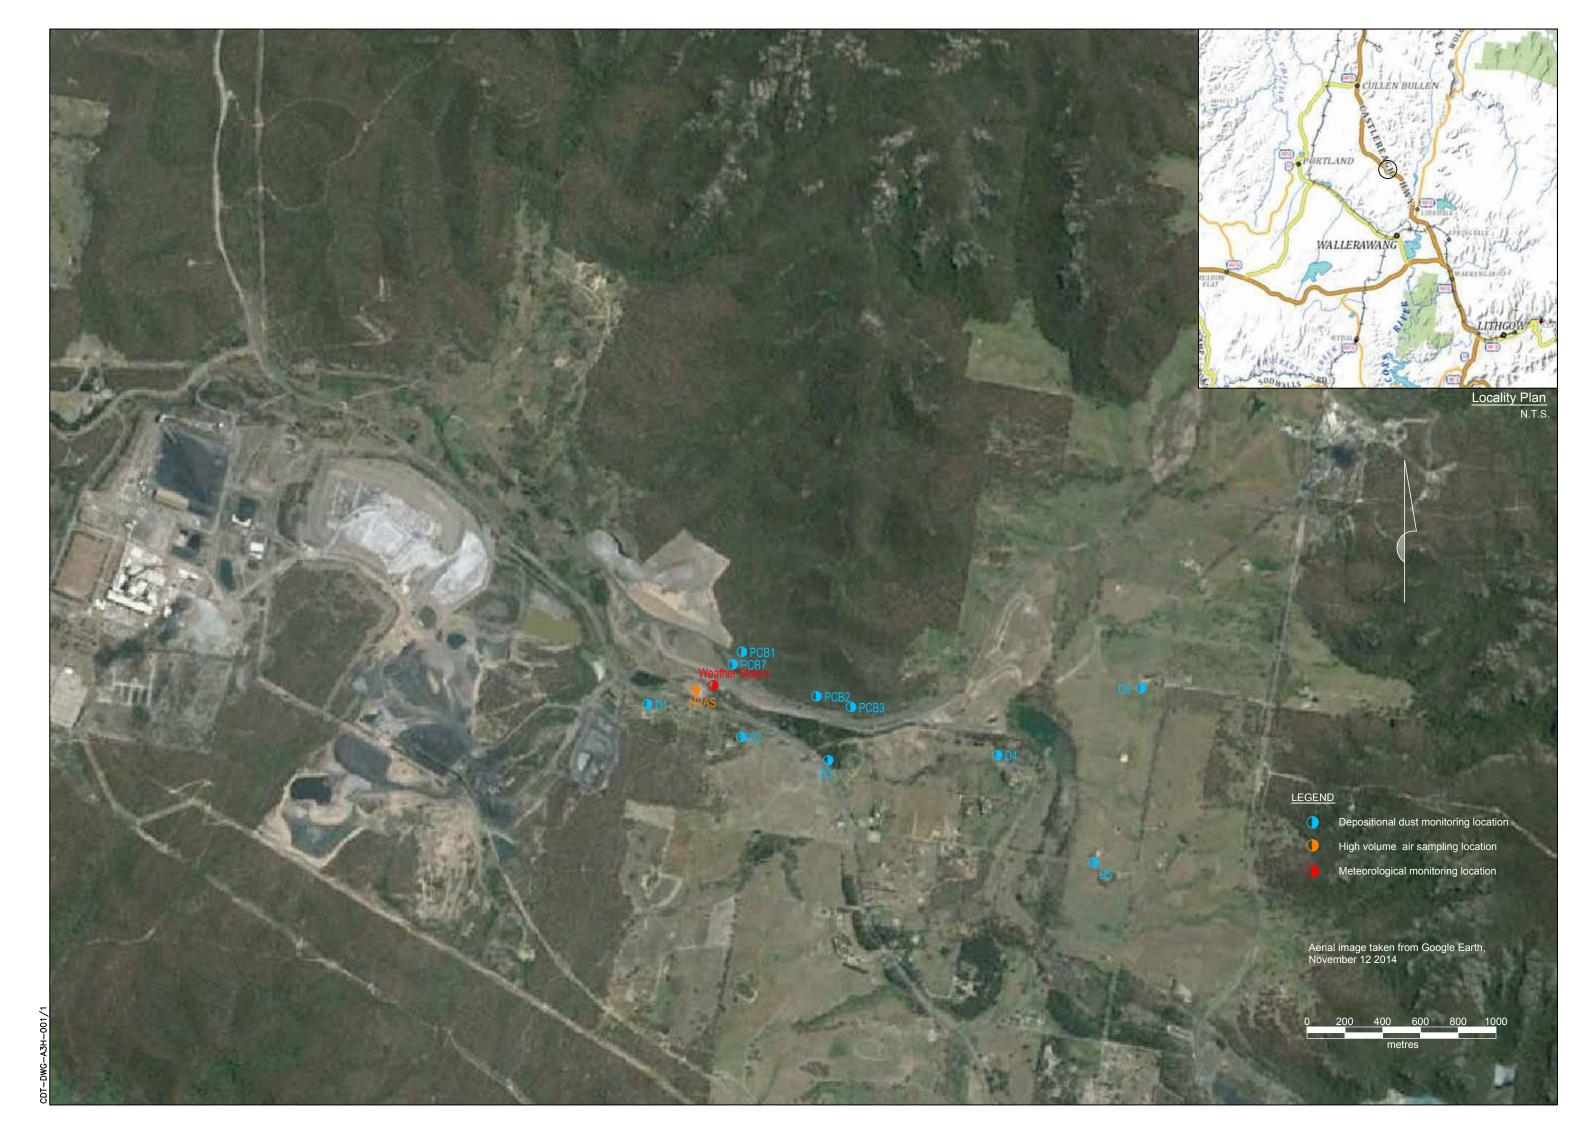



Appendix B

Depositional Dust and HVAS Graphs

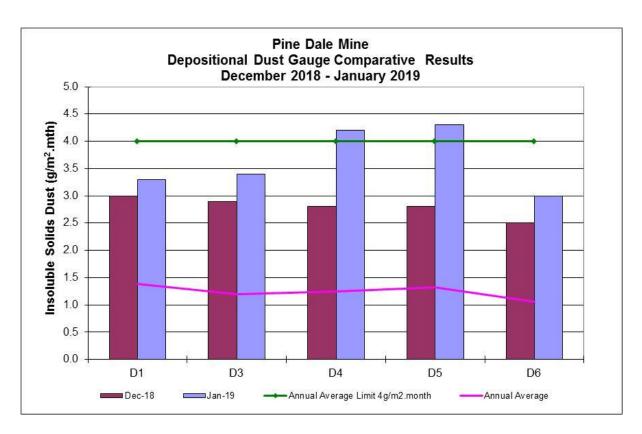

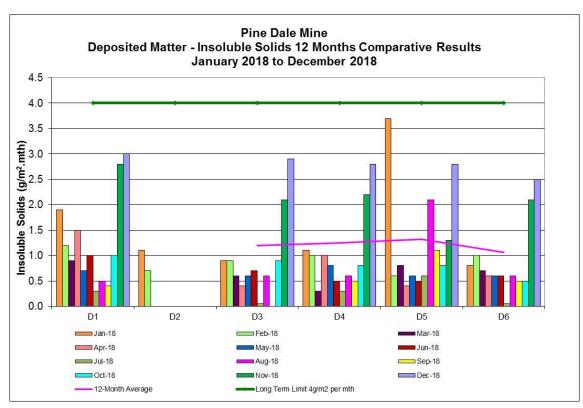


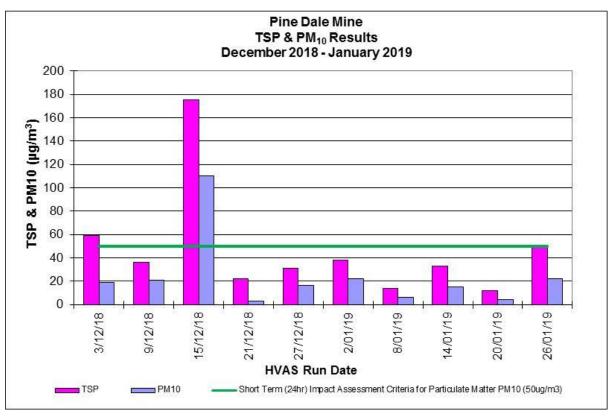


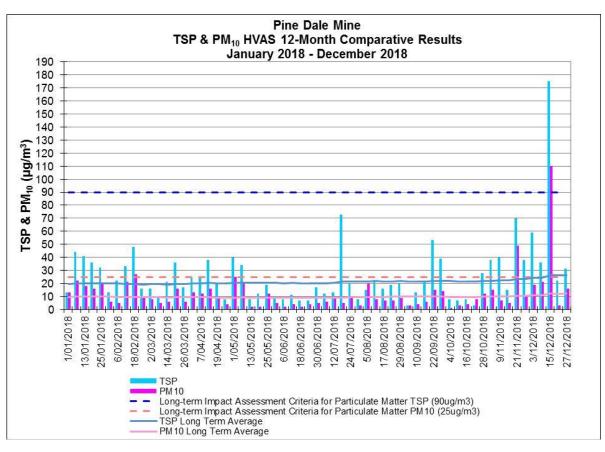



Appendix C


Meteorological Data

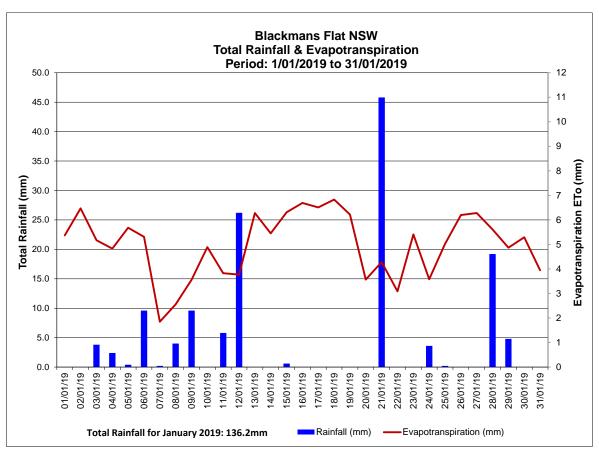


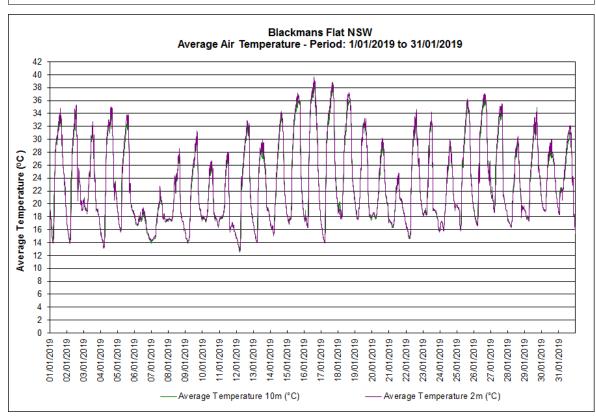


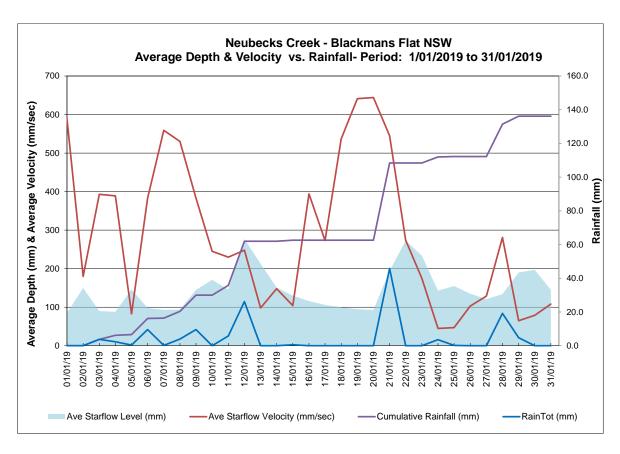


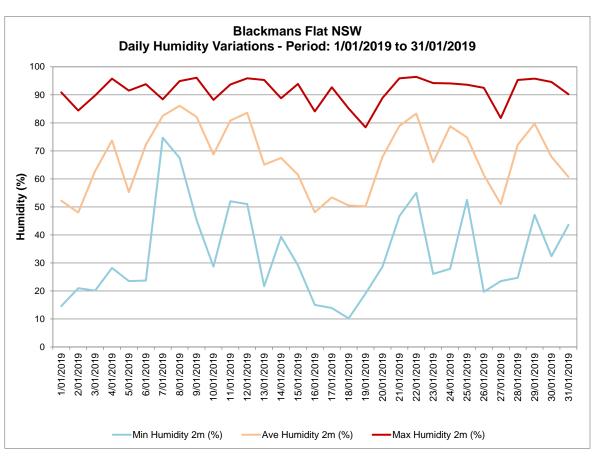

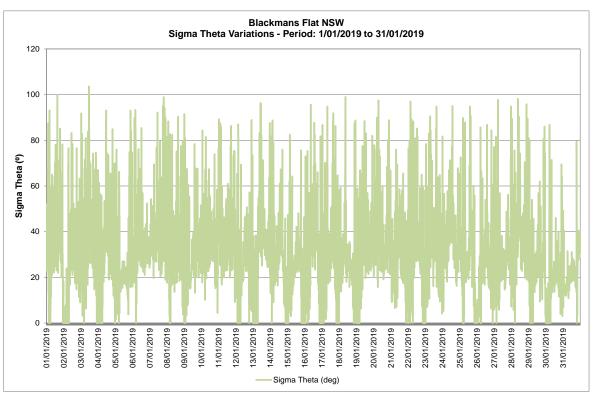

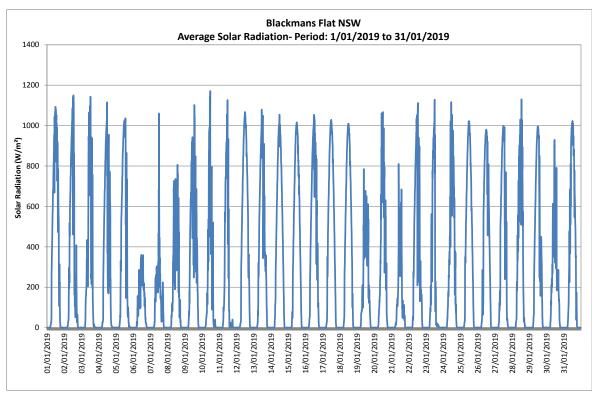



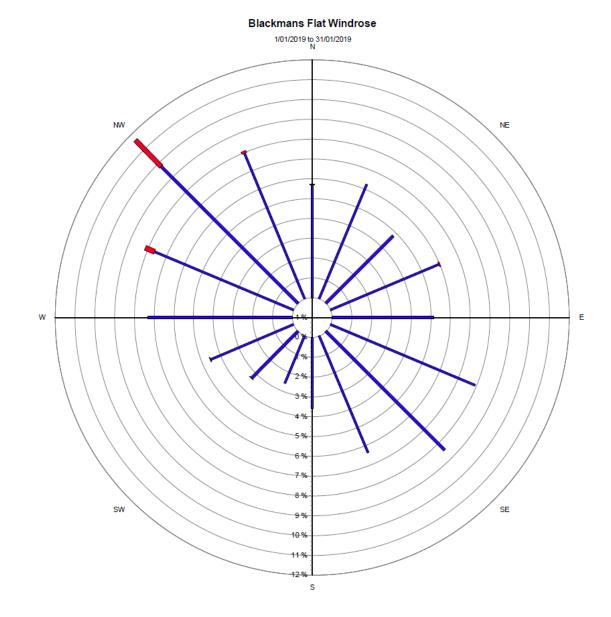

Source data: Metford.SCM 10 minutely data - Ave WndDir (deg) 10 minutely data - Ave WindSpd (m/sec)