


AIR, WATER AND METEOROLOGICAL MONITORING – APRIL 2019 PINE DALE MINE, BLACKMANS FLAT

Prepared for Pine Dale Mine Community Consultative Committee Prepared by RCA Australia RCA ref 6880-1796/0



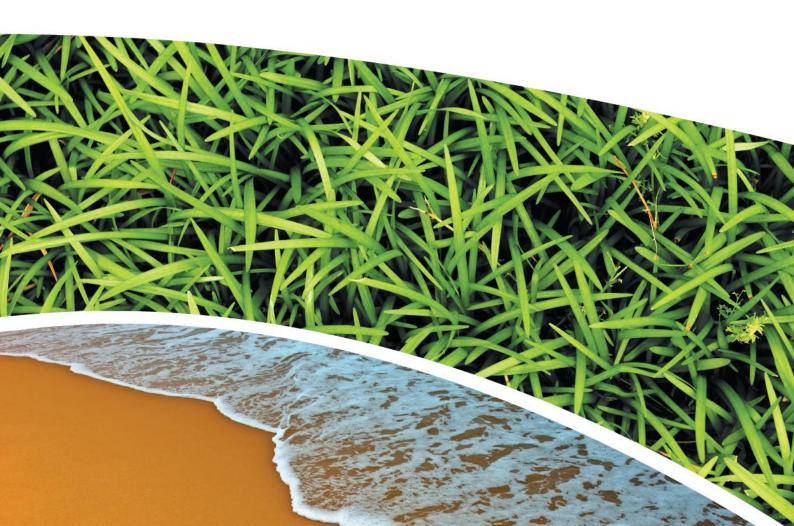

RCA AUSTRALIA

ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200 Facsimile: +61 2 4902 9299 Email: <u>administrator@rca.com.au</u> Internet: www.rca.com.au

This document is and shall remain the property of RCA Australia. The document may only be used for the purpose for which it was commissioned and in accordance with the Terms of Engagement. Unauthorised use of this document in any form whatsoever is prohibited.

	DOCUMENT STATUS						
Rev No	Comment Author		Approved fo	or Issue (Project Man	ject Manager)		
				Signature	Date		
/0	Final	C Rocher	C Rocher	Roh	16.05.2019		

			DOCUMENT DISTRIBUTION	
Rev No	Copies	Format	Issued to	Date
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	16.05.2019
/0	1	Electronic (email)	Energy Australia- Mark Frewin mark.frewin@energyaustralia.com.au	16.05.2019
/0	1	Electronic (email)	Lithgow City Council – Andrew Muir andrew.muir@lithgow.nsw.gov.au	16.05.2019
/0	1	Electronic report	RCA – job archive	16.05.2019





Contents

1	INTR	ODUCTION	1
2	ANA	LYTICAL PROCEDURES	1
3	WAT	ER MONITORING RESULTS	3
	3.1 3.2	GROUNDWATER SURFACE WATER MONITORING	
4	AIR C	QUALITY RESULTS	4
	4.1 4.2	4.1.1 TSP SUMMARY	4 5 5
5	MET	EOROLOGICAL MONITORING	5
6	BLAS	STING RESULTS	6
7	NOIS	SE MONITORING RESULTS	6
8	OPE	RATIONAL ACTIVITIES	6
9	SUM	MARY	6

APPENDIX A


MONITORING LOCATIONS

APPENDIX B

DEPOSITIONAL DUST AND HVAS GRAPHS

APPENDIX C

METEOROLOGICAL DATA



16 May 2019

Enhance Place Pty Ltd PO Box 202 WALLERWANG NSW 2845

Attention: Mr Graham Goodwin



Geotechnical Engineering

Engineering Geology

Environmental Engineering

Hydrogeology

Construction Materials Testing

Environmental Monitoring

Sound & Vibration

Occupational Hygiene

REPORT COMPILED FOR COMMUNITY CONSULTATIVE COMMITTEE DETAILING AIR, WATER AND METEOROLOGICAL MONITORING AT PINE DALE MINE APRIL 2019

1 INTRODUCTION

This report presents the results of air, water and meteorological monitoring undertaken at Pine Dale Mine, Blackmans Flat during the month of April 2019.

Air and water samples were collected by RCA Laboratories – Environmental staff. Meteorological data was obtained from the site weather station.

This report satisfies the requirements to monitor environmental parameters as presented in the Pine Dale Mine Environmental Protection Licence (EPL 4911).

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental (NATA Accreditation number 9811) are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**.

Table 1	Analytical Test Methods
---------	-------------------------

Analysis	Method	Units	Analysing Laboratory	NATA Accreditation Status
Determination of Suspended Particulate Matter	ENV-LAB003	µg/m³	RCA Laboratories – Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m ² per month	RCA Laboratories – Environmental	NATA Analysis
рН	ENV-LAB006	рН	RCA Laboratories – Environmental	NATA Analysis
Conductivity	ENV-LAB010	µS/cm	RCA Laboratories – Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories – Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, Cl, SO4)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

ALS Environmental has been used to obtain analysis of anions, cations and dissolved metals (NATA Accreditation number 825).



3 WATER MONITORING RESULTS

3.1 **G**ROUNDWATER

A total of two (2) groundwater samples were collected from within the Pine Dale Mine site during April 2019. Water quality analysis results are shown in **Table 2**. Groundwater monitoring locations are shown in **Appendix A**.

Analysis	Units	P6	P7
Sample Number	-	04196880009	04196880010
Date Sampled	-	10/04/2019	09/04/2019
Time Sampled	-	7:45	9:05
Depth to Water from Surface	m	25.39	6.69
Water Level (AHD)	m	891.56	887.71
Temperature	°C	13.1	14.7
рН	рН	6.20	6.27
Conductivity	µS/cm	2240	850
Turbidity	NTU	62	
Dissolved Oxygen	mg/L	1.9	
Total Suspended Solids	mg/L	73	
Oil and Grease	mg/L	<5	
Bicarbonate Alkalinity (CaCO ₃)	mg/L	68	
Total Alkalinity (CaCO ₃)	mg/L	68	
Sulphate (as SO ₄)	mg/L	760	
Chloride	mg/L	53	
Calcium	mg/L	155	
Magnesium	mg/L	73	
Sodium	mg/L	78	
Potassium	mg/L	21	
Cobalt (dissolved)	mg/L	0.059	
Manganese (dissolved)	mg/L	3.21	
Nickel (dissolved)	mg/L	0.105	
Zinc (dissolved)	mg/L	0.07	
Iron (dissolved)	mg/L	41.7	
	Trigger Valu	les	
pH trigger level ^	рН	6.2 - 8.0	6.3 - 8.0
Conductivity trigger level	µS/cm	1180	852
Water Level (AHD) #	m	887.90	883.28

Table 2Groundwater Analysis Results

Indicates analysis was not required.

^ pH trigger value is exceeded if the pH is outside the nominated range.

Water Level trigger is exceeded if the AHD water level drops below the nominated trigger level. Results shown in **bold italics** indicates exceedance of trigger level.



3.2 SURFACE WATER MONITORING

Quarterly surface water monitoring was not required to be undertaken in April 2019. The next quarterly monitoring round will be undertaken in May 2019.

4 AIR QUALITY RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

Monitoring of particulate matter less than 10 micrometres (PM₁₀) and total suspended particulates (TSP) is undertaken at Pine Dale Mine using High Volume Air Samplers (HVAS). HVAS at this facility conform to AS/NZS 3580.9.3:2015, AS/NZS 3580.9.6:2015 and AS/NZS 3580.1.1:2016. The HVAS run on a one in six-day cycle, as stipulated in the *Air Quality and Greenhouse Gas Management Plan for the Pine Dale Coal Mine*. The locations of the HVAS units are shown in **Appendix A**.

HVAS Total Suspended Particulate results are shown in **Table 3**. PM₁₀ results are shown in **Table 4**. HVAS Monitoring locations are shown in **Appendix A**. Graphical HVAS result presentations are shown in **Appendix B**.

Run Date	TSP (µg/m3)	Sample Number	Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
02-Apr-19	5	04196880031	9656041	07-Apr-19	11:00	Client	24.00
08-Apr-19	60	04196880033	9586332	10-Apr-19	11:05	Client	24.00
14-Apr-19	24	04196880035	9586340	17-Apr-19	13:25	Client	24.00
20-Apr-19	13	04196880037	9586348	23-Apr-19	7:28	Client	24.00
26-Apr-19	73	04196880039	9644857	30-Apr-19	17:02	Client	24.00

Table 3	Total Suspended Particulates (TSP)
---------	------------------------------------

Table 4

Suspended Particulate Matter <10 μ m (PM₁₀)

Run Date	ΡΜ ₁₀ (μg/m³)	Sample Number	Filter Number	Date Filter Off	Time Filter Off	Field Tech	Hours Run
02-Apr-19	1	04196880032	9656042	07-Apr-19	11:05	Client	24.00
08-Apr-19	22	04196880034	9586333	10-Apr-19	11:10	Client	24.00
14-Apr-19	14	04196880036	9586341	17-Apr-19	13:30	Client	24.00
20-Apr-19	9	04196880038	9586349	23-Apr-19	7:30	Client	24.00
26-Apr-19	24	04196880040	9644858	30-Apr-19	17:05	Client	24.00

4.1.1 TSP SUMMARY

The NSW EPA Annual Mean TSP allowable limit is 90µg/m³. All TSP HVAS results recorded during this monitoring period are in compliance with consent conditions, as the *current rolling annual mean* (May 2018 to April 2019) for the TSP unit is 30.4µg/m³. The twelve-monthly graph is provided in **Appendix B**.



4.1.2 **PM**₁₀ SUMMARY

The NSW EPA 24-hour maximum PM_{10} allowable limit is $50\mu g/m^3$. The EPA annual mean PM_{10} allowable limit is $25\mu g/m^3$. All PM_{10} HVAS results recorded during this monitoring period conform to consent conditions, as the *current rolling annual mean* for the PM_{10} unit is $12.7\mu g/m^3$, which is below the allowable annual limit (refer **Appendix B**). The 24-hour maximum allowable limit of $50\mu g/m^3$ was not exceeded on any sampling event during the month of April 2019.

4.2 DEPOSITIONAL DUST MONITORING

The depositional dust monitoring exposure period for April 2019 was 11 March – 9 April 2019. Depositional dust gauges at this facility conform to AS/NZS 3580.10.1:2016 and AS/NZS 3580.1.1:2016. Depositional dust monitoring results are shown in **Table 5**. Depositional dust monitoring locations are shown in **Appendix A**.

Depositional dust gauge D2 is situated on private property; this gauge was removed at the request of the property owner in March 2018. Dust gauge D2 has been removed from EPL 4911 and monitoring is no longer required at this location.

Deposit Gauge	Number of Days	Notes	Insoluble Solids	Ash	Combustible Matter
D1	29	I	1.2	0.8	0.4
D3	29	I	1.2	0.8	0.4
D4	29	IT	1.0	0.6	0.4
D5	29	IT	0.9	0.6	0.3
D6	29	I	0.7	0.4	0.3

All units are g/m²/month

I indicates insects noted to be present in sample.

T indicates tree litter in samples (eg. leaves, twigs, gum nuts).

4.2.1 ALLOWABLE DEPOSITIONAL DUST LIMITS

The EPA long term (annual average) deposited dust limit is $4g/m^2$ per month. The rolling annual depositional dust results for all sites within the period (May 2018 – April 2019) are in compliance with consent conditions. The annual average for dust gauges D1, D3, D4, D5 and D6 are all less than or equal to $1.6g/m^2$ per month. Annual averages are shown in the depositional dust gauge graphs provided in **Appendix B**.

5 METEOROLOGICAL MONITORING

Pine Dale Mine records meteorological data continuously via an onsite weather station. Details of the weather data recorded during the period 1 to 30 April 2019 are shown in **Appendix C**.

Data availability during this period was 100%.



6 BLASTING RESULTS

No blasting was undertaken during this month as mining operations have ceased since the end of March 2014.

7 NOISE MONITORING RESULTS

Quarterly noise monitoring was not undertaken during April 2019.

8 OPERATIONAL ACTIVITIES

All of the approved minable reserves at the Pine Dale Mine have now been exhausted. Operational mining and the last coal sales ceased as of the end of March 2014.

All former operators have been made redundant; however some statutory positions still remain. Pine Dale Mine has been placed in care and maintenance since April 2014.

9 SUMMARY

During the month of April 2019 environmental monitoring results were found to be generally in compliance with EPL 4911 with the exception of:

- Electrical conductivity in groundwater sample P6 was in excess of the of the site specific trigger value.
- pH in groundwater sample P7 was below the lower pH trigger level.

Rolling annual averages from both the TSP and PM_{10} High Volume Air Samplers are currently below the EPA Annual Mean TSP and PM_{10} criterion of $90\mu g/m^3$ and $25\mu g/m^3$ respectively. Currently there are no depositional dust gauge results which are greater than the EPA Long Term (annual average) criteria of $4g/m^2$.month based upon a rolling average of the past 12 months.

Meteorological monitoring was undertaken for the entire month of April with 100% data capture.

Pine Dale Mine ceased operation in March 2014 and therefore no blasting occurred at the site. No noise monitoring was undertaken during April 2019.

This report shall only be presented in full and may not be used to support objectives other than those stated in the report without written permission from RCA Australia.

The information in this report is considered accurate at the date of issue with regard to the current conditions of the site. Conditions can vary across any site that cannot be explicitly defined by investigation.

Yours faithfully


RCA AUSTRALIA

Carmen Rocher Environmental Engineer




Appendix A

Monitoring Locations

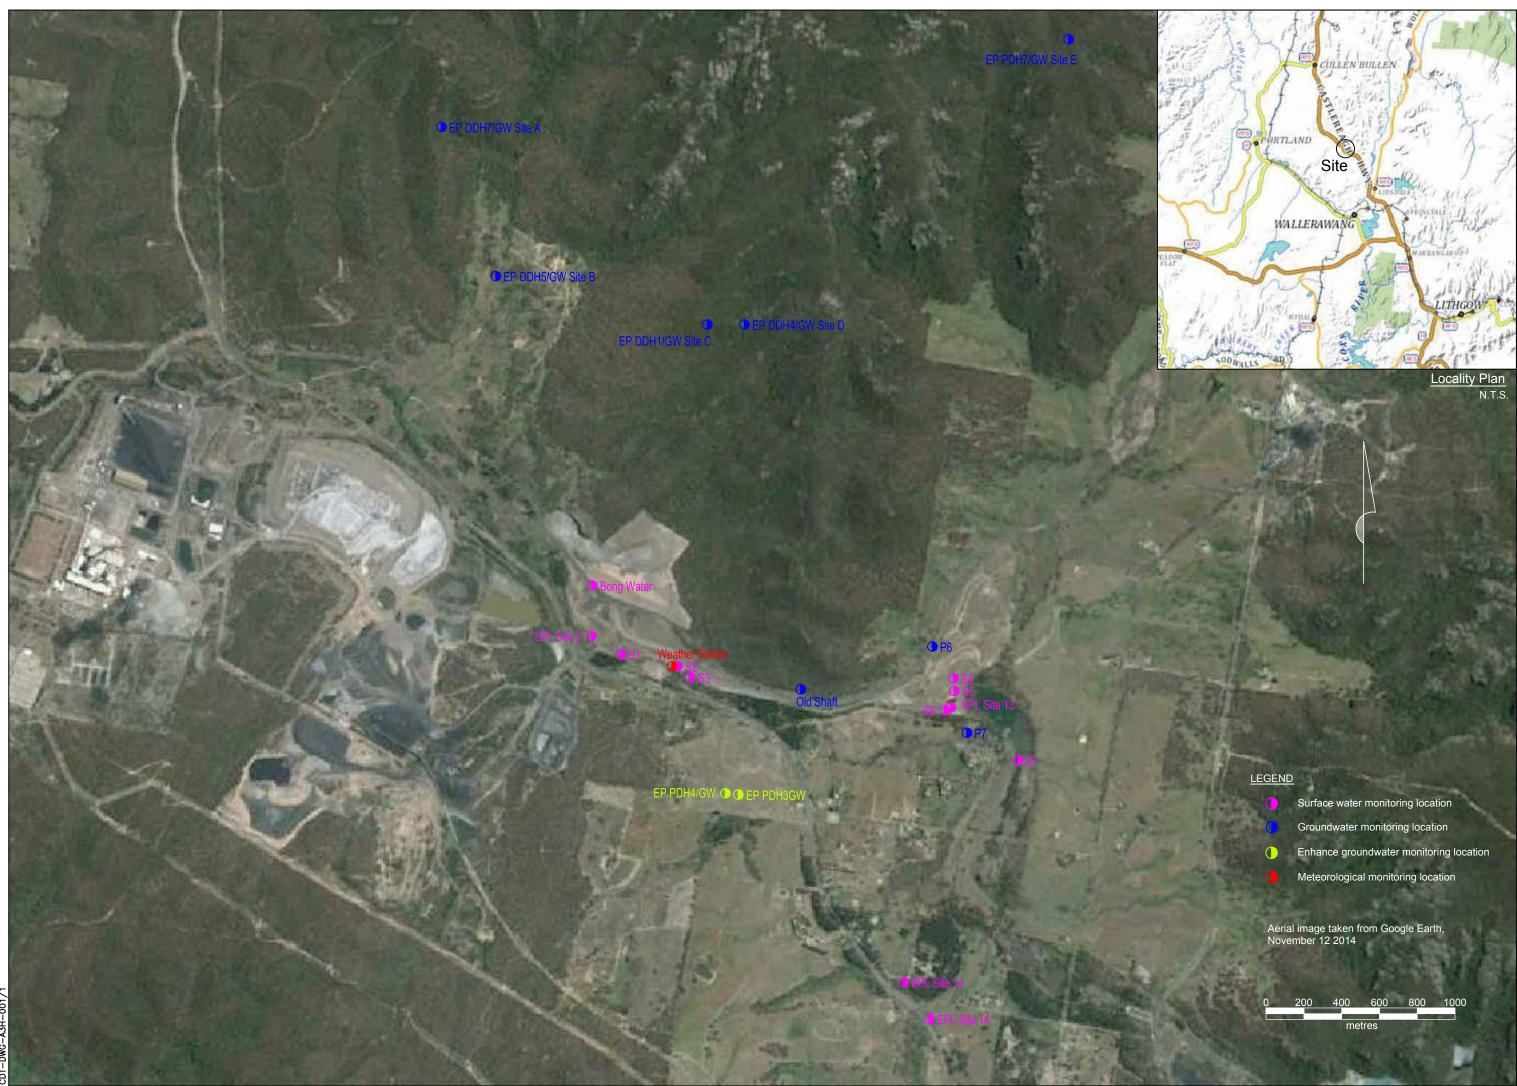



Surface water monitoring location
Groundwater monitoring location
Enhance groundwater monitoring location
Meteorological monitoring location

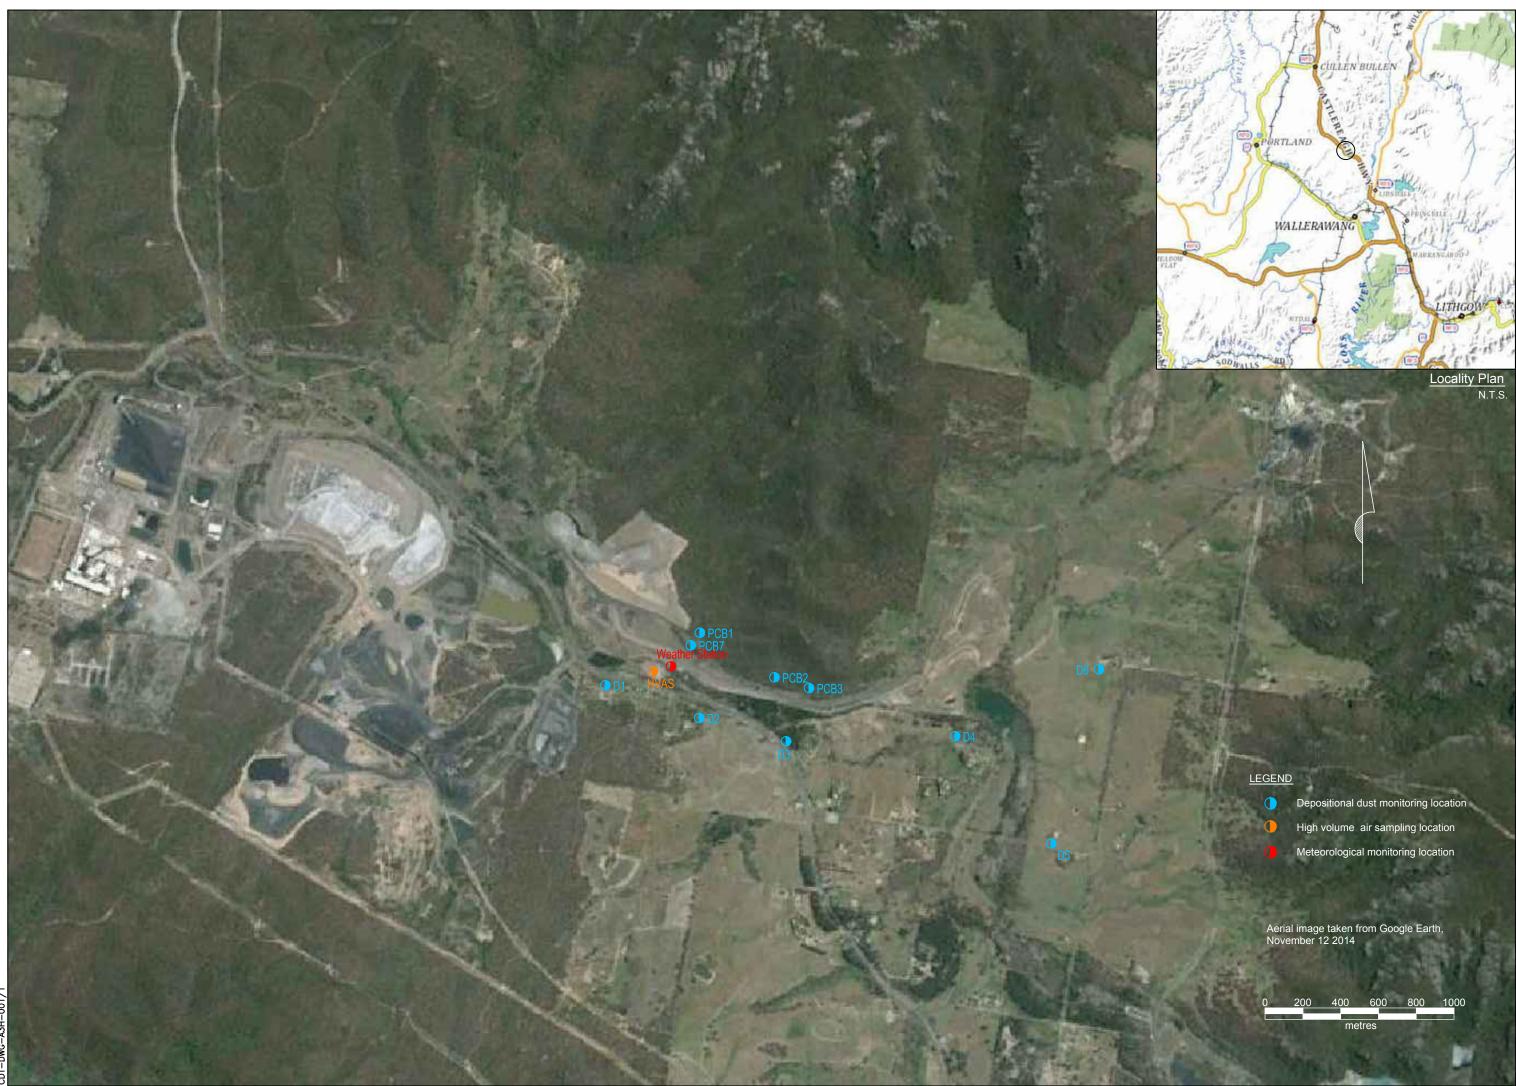

Appendix B

Depositional Dust and HVAS Graphs

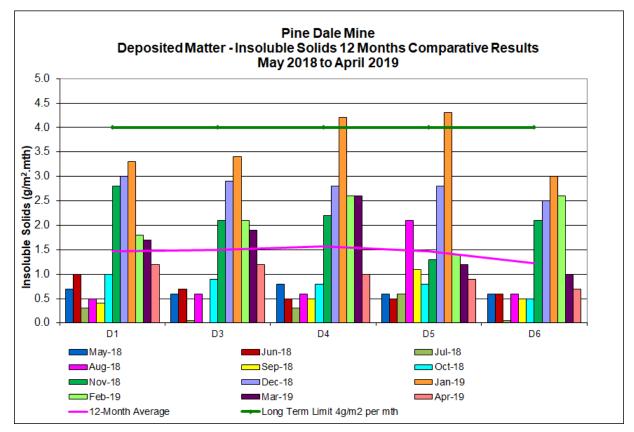

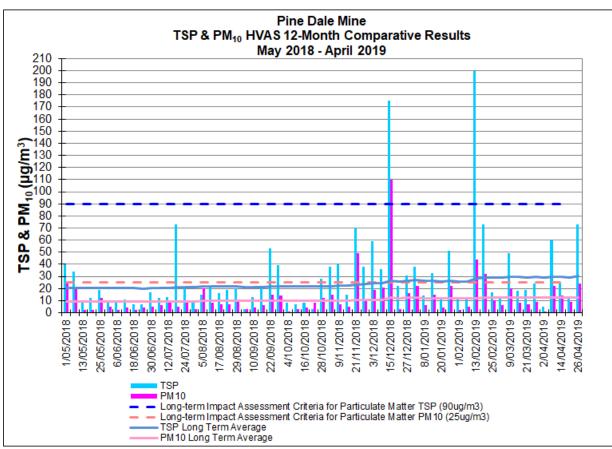

Appendix C

Meteorological Data

