


SURFACE WATER, DEPOSITIONAL DUST, HVAS AND METEOROLOGICAL MONITORING

Prepared for Pine Dale Mine Community Consultative Committee

Prepared by RCA Australia

RCA ref 6880-1716/0 June 2016



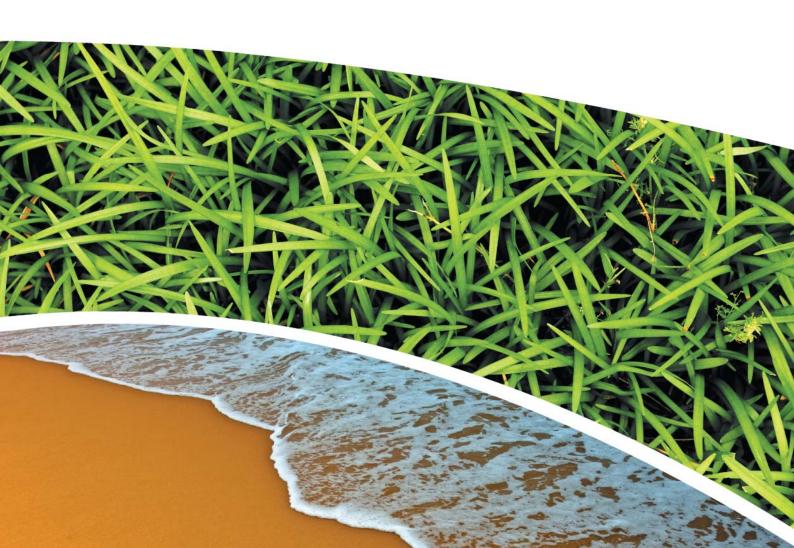

RCA AUSTRALIA

ABN 53 063 515 711

92 Hill Street, CARRINGTON NSW 2294

Telephone: +61 2 4902 9200 Facsimile: +61 2 4902 9299 Email: <u>administrator@rca.com.au</u> Internet: <u>www.rca.com.au</u>

This document is and shall remain the property of RCA Australia. The document may only be used for the purpose for which it was commissioned and in accordance with the Terms of Engagement for the commission supplied at the time of proposal. Unauthorised use of this document in any form whatsoever is prohibited.

	DOCUMENT STATUS										
Rev				Approved for Issue (Project Manager)							
No	Comment	Author	Reviewer	Name	Signature	Date					
/0	Final	C Rocher	K Tripp	K Tripp	AT	15.07.16					

	DOCUMENT DISTRIBUTION								
Rev No	Copies	opies Format Issued to							
/0	1	Electronic (email)	Pine Dale Mine – Graham Goodwin graham.goodwin@energyaustralia.com.au	15.07.16					
/0	1	Electronic (email)	EnergyAustralia- Mark Frewin mark.frewin@energyaustralia.com.au	15.07.16					
/0	1	Electronic (email)	Lithgow City Council – Andrew Muir andrew.muir@lithgow.nsw.gov.au	15.07.16					
/0	1	Electronic report	RCA – job archive	15.07.16					





RCA LE ref 6880-1716/0



15 July 2016

Pine Dale Mine PO Box 202 WALLERAWANG NSW 2845

Attention: Mr Graham Goodwin

REPORT COMPILED FOR PINE DALE MINE COMMUNITY CONSULTATIVE COMMITTEE DETAILING SURFACE WATER, GROUNDWATER DEPOSITIONAL DUST, HVAS AND METEOROLOGICAL MONITORING JULY 2016

1 GENERAL COMMENTS

Job Number: 6880.

Date Samples Received: During the month of June 2016.

Samples received were sampled by RCA Laboratories – Environmental staff.

This report satisfies the requirements to monitor environmental parameters as presented in the Pine Dale Mine Environmental Protection Licence (EPL 4911).

2 ANALYTICAL PROCEDURES

The analytical procedures used by RCA Laboratories – Environmental are based on established internationally recognised procedures such as APHA and Australian Standards. Analytical test methods are detailed in **Table 1**. When an external testing laboratory is used to obtain the analysis of samples which become a part of this report, then the details of that laboratory's official report will be attached in an Appendix.

 Table 1
 Analytical Test Methods

ANALYSIS	METHOD	UNITS	ANALYSING LABORATORY	NATA / NON- NATA ANALYSIS
Determination of Suspended Particulate Matter	ENV-LAB003	μg/m³	RCA Laboratories – Environmental	NATA Analysis
Determination of Particulate Matter – Deposited Matter	ENV-LAB004	g/m ² .month	RCA Laboratories – Environmental	NATA Analysis
рH	ENV-LAB006	рН	RCA Laboratories – Environmental	NATA Analysis
Conductivity	ENV-LAB010	μS/cm	RCA Laboratories – Environmental	NATA Analysis
Total Suspended Solids	ENV-LAB009	mg/L	RCA Laboratories – Environmental	NATA Analysis
Turbidity	ENV-LAB037	NTU	RCA Laboratories - Environmental	NATA Analysis
Oil and Grease	ENV-LAB022	mg/L	RCA Laboratories - Environmental	Non-NATA Analysis
Major Anions (Alkalinity, Cl, SO ₄)	ED037, ED041, ED045	mg/L	ALS	NATA Analysis
Major Cations (Ca, Mg, Na, K)	ED093	mg/L	ALS	NATA Analysis
Dissolved Metals	EG020F	mg/L	ALS	NATA Analysis

3 WATER MONITORING RESULTS

3.1 GROUNDWATER

A total of 2 on-site groundwater samples were collected during the month of June 2016. Sampling at Bores P2, P3 and P7a are no longer required under the new sampling regime undertaken in accordance with Project Approval (PA 10_0041) and the Pine Dale Mine Water Management Plan (Report No. 613/20). This sampling regime commenced 1 August 2013. Water quality analysis results are shown in **Table 2**.

 Table 2
 Groundwater Analysis Results – Monthly Monitoring

ANALYSIS	UNITS	P6	P7				
Sample Number	-	06166880009	06166880010				
Date Sampled	-	06/06/16	06/06/16				
Time Sampled	-	13:43	14:22				
Depth to Water from Surface	m	25.13	6.76				
Water Level (AHD)	m	891.82	887.64				
Temperature	°C	13.9	14.7				
pH	рН	6.17	6.40				
Conductivity	μS/cm	1391	888				
Turbidity	NTU	28					
Dissolved Oxygen	mg/L	7.9					
TSS	mg/L	10					
Oil and Grease	mg/L	<2					
Bicarbonate Alkalinity (CaCO ₃)	mg/L	74					
Total Alkalinity (CaCO ₃)	mg/L	74					
Sulfate (as SO ₄)	mg/L	594					
Chloride	mg/L	35					
Calcium	mg/L	132					
Magnesium	mg/L	61					
Sodium	mg/L	56					
Potassium	mg/L	19					
Cobalt (dissolved)	mg/L	0.056					
Manganese (dissolved)	mg/L	2.52					
Nickel (dissolved)	mg/L	0.104					
Zinc (dissolved)	mg/L	0.545					
Iron (dissolved)	mg/L	27.5					
Trigger Levels							
pH trigger level	рН	6.2 - 8.0	6.3 – 8.0				
Conductivity trigger level	μS/cm	1180	852				
Water Level (AHD) #	m	887.90	883.28				

NOTES: *Depth relative to ground level (not standpipe height).

Indicates analysis was not required

Results shown in *italics* indicates exceedance of trigger level

Groundwater monitoring locations are shown in **Appendix 1**.



3.2 EPA SURFACE WATER MONITORING

Routine quarterly surface water monitoring was not required to be undertaken during the month of June 2016. The next EPA quarterly surface monitoring round will be undertaken during August 2016.

4 AIR QUALITY MONITORING RESULTS

4.1 HIGH VOLUME AIR SAMPLERS (HVAS)

HVAS at this facility conform to AS/NZS 3580.9.3:2015, AS/NZS 3580.9.6:2003 and AS/NZS 3580.1.1:2007.

HVAS Total Suspended Particulate analysis results are shown in Table 3.

PM₁₀ Suspended Particulate Matter results are shown in **Table 4**.

Table 3 Total Suspended Particulates (μg/m³ 0°C 101.3 kPa)

RUN DATE	TSP (µg/m³)	SAMPLE NUMBER	FILTER NUMBER	DATE FILTER OFF	TIME FILTER OFF	FIELD TECH	HOURS RUN
04-Jun-16	5	06166880029	9203740	07-Jun-16	6:01	Client	24.00
10-Jun-16	8	06166880031	9203741	14-Jun-16	7:50	Client	24.00
16-Jun-16	11	06166880033	9203743	18-Jun-16	12:37	Client	24.00
22-Jun-16	4	06166880035	9203745	24-Jun-16	15:35	Client	24.00
28-Jun-16	7	06166880037	9208877	01-Jul-16	15:10	Client	24.00

Table 4 Suspended Particulate Matter PM₁₀ (μg/m³ 0°C 101.3 kPa)

RUN DATE	PM ₁₀ (μg/m³)	SAMPLE NUMBER	FILTER NUMBER	DATE FILTER OFF	TIME FILTER OFF	FIELD TECH	HOURS RUN
04-Jun-16	1	06166880030	9203738	07-Jun-16	6:06	Client	34.00
10-Jun-16	4	06166880032	9203742	14-Jun-16	7:55	Client	24.04
16-Jun-16	5	06166880034	9203744	18-Jun-16	12:42	Client	24.00
22-Jun-16	2	06166880036	9203746	24-Jun-16	15:40	Client	24.00
28-Jun-16	3	06166880038	9203747	01-Jul-16	15:15	Client	24.00

4.1.1 TSP Summary

The EPA Annual Mean TSP allowable limit is $90\mu g/m^3$. All TSP HVAS results recorded during this monitoring period are in compliance with consent conditions, as the *current rolling annual mean* (from July 2015 to June 2016) for the TSP unit is $18.9\mu g/m^3$, which is well below the allowable limit of $90\mu g/m^3$.

4.1.2 **PM**₁₀ **Summary**

The EPA 24h Maximum PM_{10} allowable limit is $50\mu g/m^3$. The EPA Annual Mean PM_{10} allowable limit is $30\mu g/m^3$. All PM_{10} HVAS results recorded during this monitoring period conform to consent conditions, as the *current rolling annual mean* for the PM_{10} unit is $9.5\mu g/m^3$, which is below the allowable limit of $30\mu g/m^3$. The 24 hour maximum allowable limit of $50\mu g/m^3$ was not exceeded during the month of June 2016.

4.1.3 Comments

HVAS monitoring locations are shown in **Appendix 1**.

Graphical HVAS results presentations are shown in **Appendix 2**.



4.2 DEPOSITIONAL DUST

Depositional Dust Gauges at this facility conform to AS/NZS 3580.10.1:2003 and AS/NZS 3580.1.1:2007. Depositional Dust monitoring results are shown in **Table 5**.

 Table 5
 Depositional Dust Monitoring - Deposited Matter – June 2016

SAMPLE NUMBER	DEPOSIT GAUGE	DATE SAMPLE STARTED	DATE SAMPLE COMPLETED	NUMBER OF DAYS	NOTES	INSOLUBLE SOLIDS (g/m².month)	ASH (g/m².month)	COMBUSTIBLE MATTER (g/m².month)
06166880021	D1	5/05/2016	6/06/2016	32	I	0.1	< 0.1	0.1
06166880022	D2	5/05/2016	6/06/2016	32	I	< 0.1	< 0.1	< 0.1
06166880023	D3	5/05/2016	6/06/2016	32	I	0.5	0.1	0.4
06166880024	D4	5/05/2016	6/06/2016	32	I	0.6	< 0.1	0.6
06166880025	D5	5/05/2016	6/06/2016	32	I	0.5	0.1	0.4
06166880026	D6	5/05/2016	6/06/2016	32	I	0.7	0.2	0.5

Glossary of Terms Used in Notes:

I Insects (eg, Ants, Spiders)

4.2.1 Allowable Depositional Dust Limits

The EPA Long Term (Annual Average) Dust Limit is 4g/m² per month. All Depositional Dust results during this monitoring period are in compliance with consent conditions. The Annual Average for Dust Gauges D1, D2, D3, D4, D5 and D6 are all less than or equal to 1.4g/m² per month, which is below the allowable Annual Average Long Term Limit of 4g/m² per month.

Depositional Dust monitoring locations are shown in **Appendix 1**. Graphical Depositional Dust results are shown in **Appendix 2**.



5 BLASTING RESULTS

No blasting was undertaken during this month as mining operations have ceased since the end of March 2014.

6 NOISE MONITORING RESULTS

Routine quarterly noise monitoring was not required to be undertaken this month. The next quarterly round (quarter 3) was scheduled to be undertaken during July 2016; however due to inclement weather conditions noise monitoring was rescheduled for September 2016.

7 OPERATIONAL ACTIVITIES

All of the approved minable reserves at the Pine Dale Mine have now been exhausted. Operational mining and the last coal sales ceased as of the end of March 2014.

All former operators have been made redundant; however some statutory positions still remain. Pine Dale Mine has been placed in care and maintenance since April 2014.

8 SUMMARY

During the month of June 2016 environmental monitoring constituents were found to be generally in compliance with EPL 4911.

Rolling annual averages from both the TSP and PM_{10} High Volume Air Samplers are currently well below the EPA Annual Mean TSP and PM_{10} criterion of $90\mu g/m^3$ and $30\mu g/m^3$ respectively.

Currently there are no depositional dust gauge results which are greater than the EPA Long Term (annual average) criteria of 4g/m².month based upon a rolling average of the past 12 months.

Pine Dale Mine ceased operation in March 2014 and therefore no blasting occurred at the site.

This report must not be reproduced except in full. Results or figures from this report must not be used without acknowledgment.

Please contact the undersigned if you have any queries.

Yours sincerely

Carmen Rocher
Environmental Engineer
RCA Australia Pty Ltd trading as
RCA Laboratories – Environmental


Karen Tripp Senior Environmental Scientist/Hygienist RCA Australia Pty Ltd trading as RCA Laboratories – Environmental


A Tul




Appendix 1

Surface Water Groundwater and Air Quality Monitoring Locations

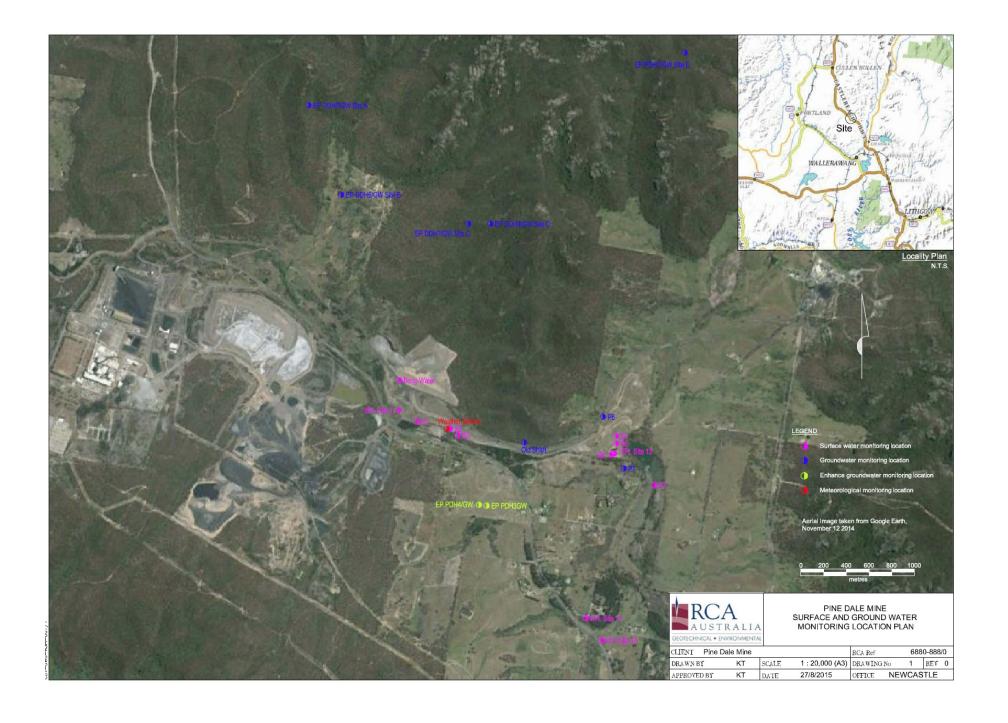


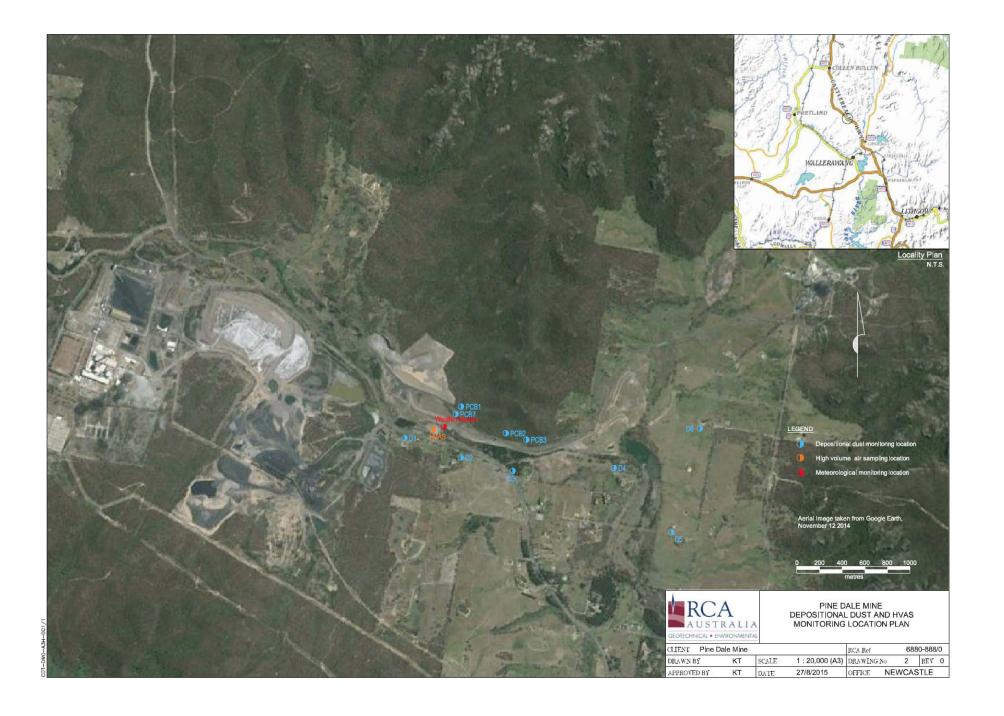


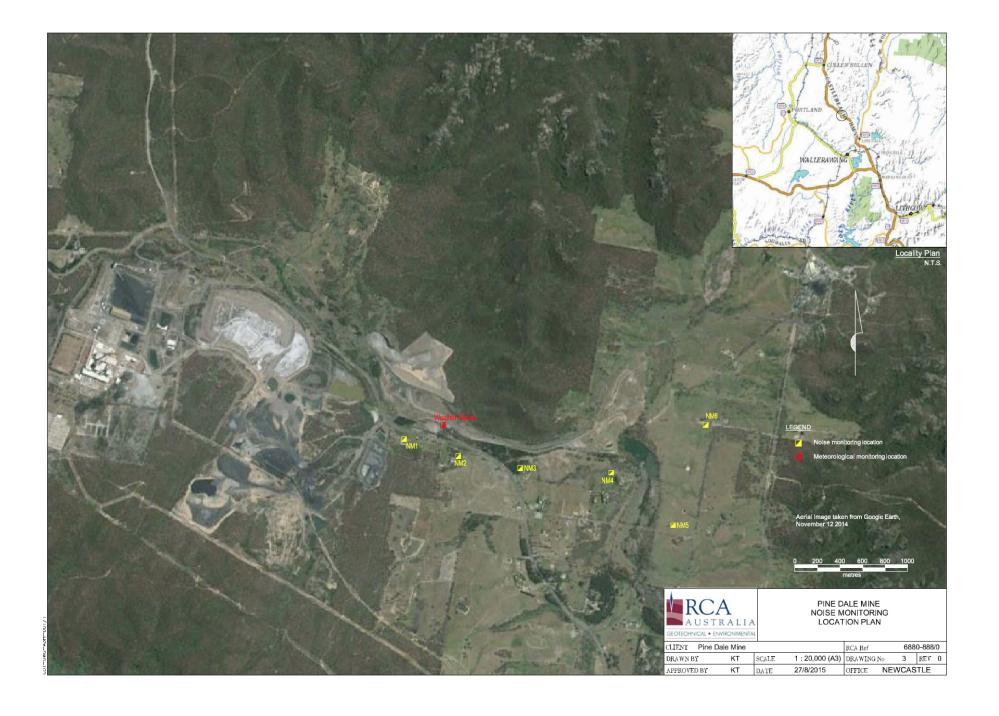



Appendix 2

Depositional Dust and HVAS Graphs

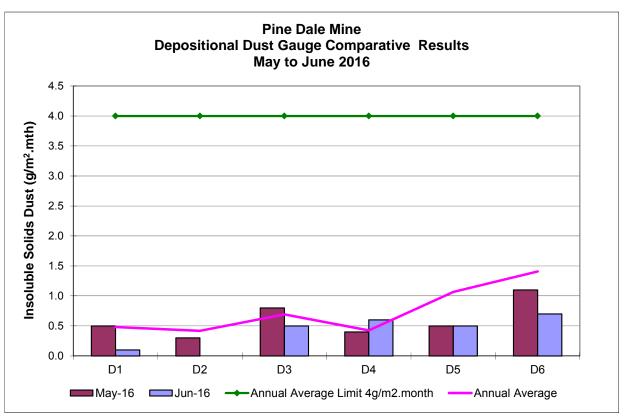

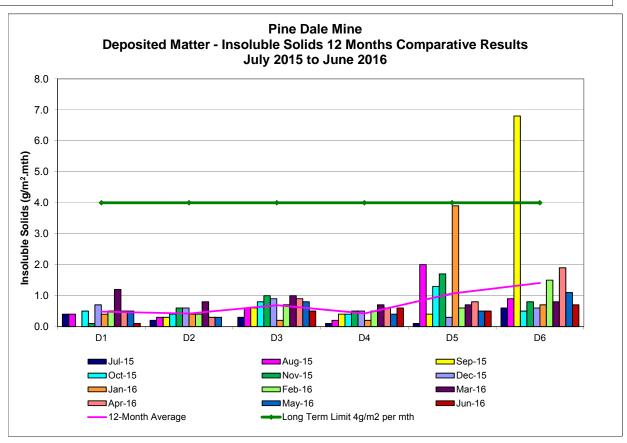


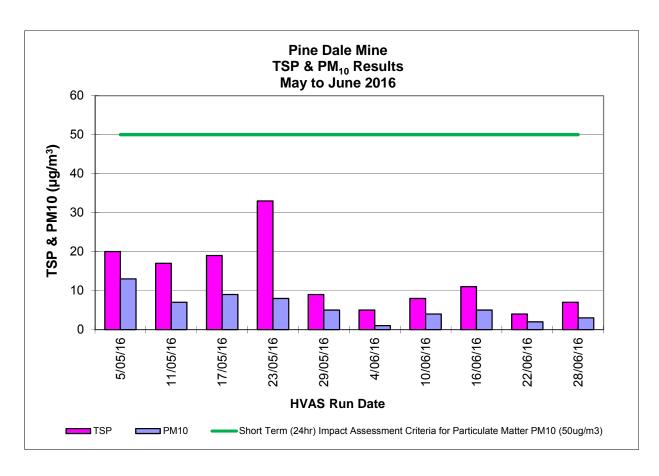


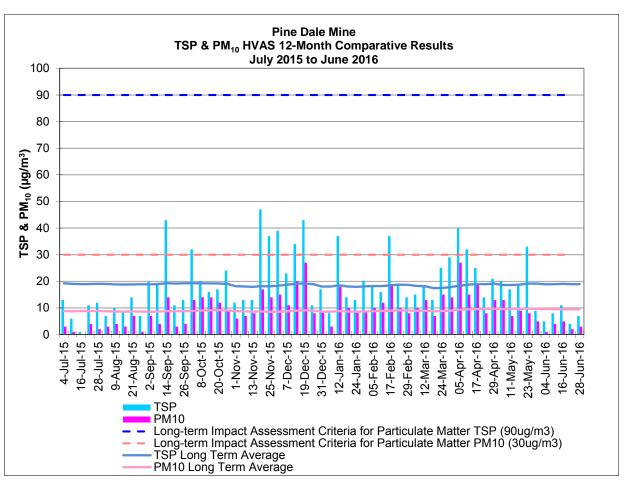



Appendix 3


Meteorological Data

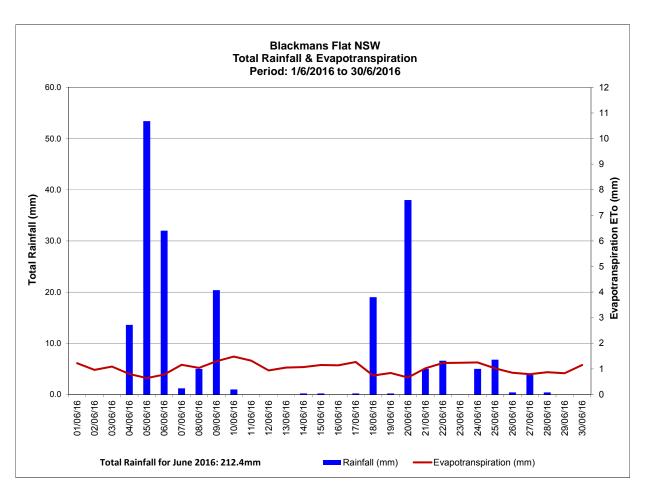


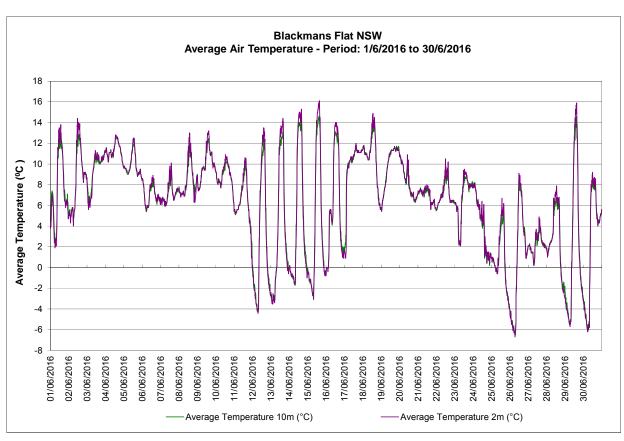


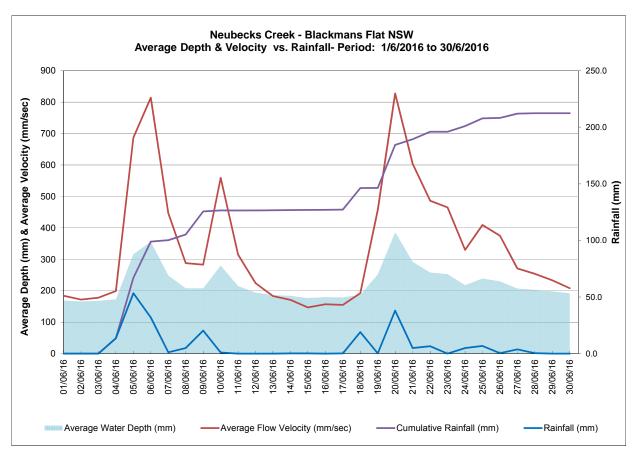

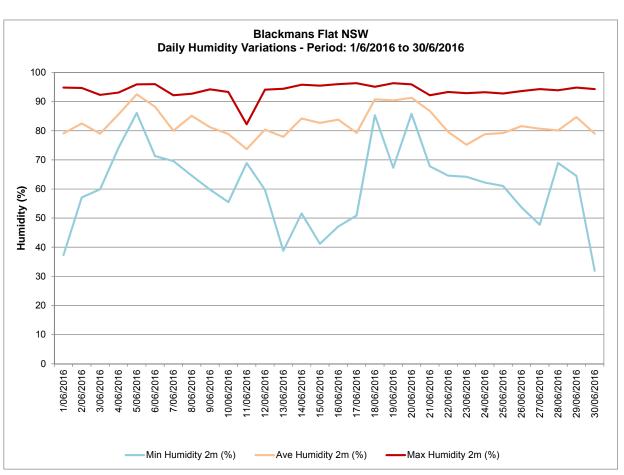


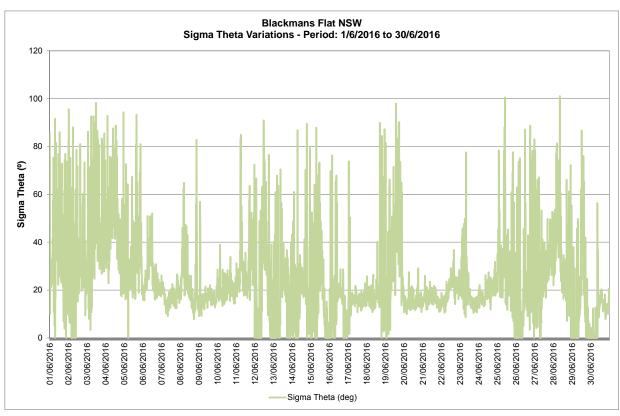

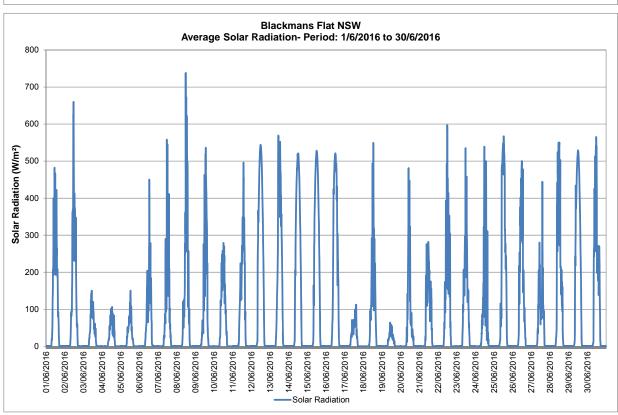



Blackmans Flat Windrose

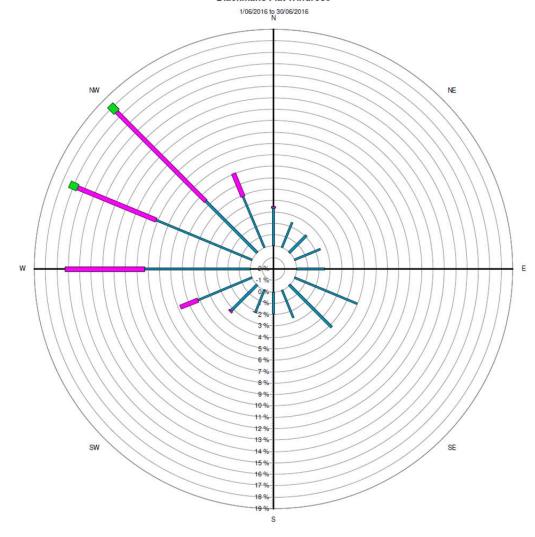

Source data: Metford.SCM 10 minutely data - Ave WndDir (deg) 10 minutely data - Ave WindSpd (m/sec)